



**UvA-DARE (Digital Academic Repository)**

**Odour and flavour thresholds of gasoline additives (MTBE, ETBE and TAME) and their occurrence in Dutch drinking water collection areas**

van Wezel, A.; Puijker, L.; Vink, C.; Versteegh, A.; de Voogt, P.

*Published in:*  
Chemosphere

*DOI:*  
[10.1016/j.chemosphere.2009.03.073](https://doi.org/10.1016/j.chemosphere.2009.03.073)

[Link to publication](#)

*Citation for published version (APA):*  
van Wezel, A., Puijker, L., Vink, C., Versteegh, A., & de Voogt, P. (2009). Odour and flavour thresholds of gasoline additives (MTBE, ETBE and TAME) and their occurrence in Dutch drinking water collection areas. *Chemosphere*, 76(5), 672-676. <https://doi.org/10.1016/j.chemosphere.2009.03.073>

**General rights**

It is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), other than for strictly personal, individual use, unless the work is under an open content license (like Creative Commons).

**Disclaimer/Complaints regulations**

If you believe that digital publication of certain material infringes any of your rights or (privacy) interests, please let the Library know, stating your reasons. In case of a legitimate complaint, the Library will make the material inaccessible and/or remove it from the website. Please Ask the Library: <https://uba.uva.nl/en/contact>, or a letter to: Library of the University of Amsterdam, Secretariat, Singel 425, 1012 WP Amsterdam, The Netherlands. You will be contacted as soon as possible.



## Odour and flavour thresholds of gasoline additives (MTBE, ETBE and TAME) and their occurrence in Dutch drinking water collection areas

Annemarie van Wezel<sup>a,\*</sup>, Leo Puijker<sup>a</sup>, Cees Vink<sup>a</sup>, Ans Versteegh<sup>b</sup>, Pim de Voogt<sup>a,c</sup>

<sup>a</sup> KWR Watercycle Research Institute, Nieuwegein, The Netherlands

<sup>b</sup> RIVM, National Institute for Public Health and the Environment, Bilthoven, The Netherlands

<sup>c</sup> IBED, Universiteit van Amsterdam, Amsterdam, The Netherlands

### ARTICLE INFO

#### Article history:

Received 15 September 2008

Received in revised form 27 March 2009

Accepted 30 March 2009

Available online 27 May 2009

#### Keywords:

MTBE

ETBE

TAME

Occurrence

Odour

### ABSTRACT

The use of ETBE (ethyl-*tert*-butylether) as gasoline additive has recently grown rapidly. Contamination of aquatic systems is well documented for MTBE (methyl-*tert*-butylether), but less for other gasoline additives. Due to their mobility they may easily reach drinking water collection areas. Odour and flavour thresholds of MTBE are known to be low, but for ETBE and TAME (methyl-*tert*-amylether) hardly information is available. The objective here is to determine these thresholds for MTBE, ETBE and TAME, and relate these to concentrations monitored in thousands of samples from Dutch drinking water collection areas.

For ETBE odour and flavour thresholds are low with 1–2  $\mu\text{g L}^{-1}$ , for MTBE and TAME they range from 7 to 16  $\mu\text{g L}^{-1}$ .

In most groundwater collection areas MTBE concentrations are below 0.1  $\mu\text{g L}^{-1}$ . In phreatic groundwaters in sandy soils not covered by a protective soil layer, occasionally MTBE occurs at higher concentrations. For surface water collection areas a minority of the locations is free of MTBE. For river bank and dune infiltrates, at a few locations the odour and flavour threshold is exceeded. For ETBE fewer monitoring data are available. ETBE was found in 2 out of 37 groundwater collection areas, in concentrations below 1  $\mu\text{g L}^{-1}$ . In the surface water collection areas monitored ETBE was found in concentrations near to the odour and flavour thresholds.

The low odour and flavour thresholds combined with the high mobility and persistence of these compounds, their high production volumes and their increased use may yield problems with future production of drinking water.

© 2009 Elsevier Ltd. All rights reserved.

### 1. Introduction

Methyl-*tert*-butylether (MTBE), methyl-*tert*-amylether (TAME) and ethyl-*tert*-butylether (ETBE) are fuel oxygenates which are in use as gasoline additives. The use of ETBE as gasoline additive recently increases rapidly in Europe, as a result of the highly debated European Biofuels Directive (2003/30/EG) which sets a minimum market share for biofuels of 5.75% in 2010. Bio-ETBE can be etherised from bioethanol and is considered a biofuel for 47 vol%, and similarly bio-MTBE from biomethanol is considered a biofuel for 36 vol% (2002/30/EG). Addition of bio-MTBE and especially bio-ETBE to gasoline can thus help to fulfil the obligation set by the Biofuel Directive.

The commercial production of MTBE started in the seventies (DeWitt & Company Inc., 2000) and MTBE was introduced into pet-

rol in the late 1970s to mid-1980s (Kraayer von Krauss and Harremoës, 2001). With a worldwide annual production of about 21.4 Mt in 1999 (3.4 Mt in the EU) MTBE is a very high production-volume chemical.

Production volumes of TAME and ETBE are lower, with, respectively, 287 and 568 kt in 2002 (EC, 2005; ECB, 2006). However, the production of ETBE is increasing (Vierhout, 2005). In 2006, a third of the European production capacity of MTBE was adapted to produce ETBE. The production capacity in The Netherlands is high compared to most other EU member states, but emissions of these compounds are not registered routinely (pers. comm. C. Peek, Netherlands Environmental Assessment Agency).

Due to their high solubility and volatility the gasoline additives disperse rapidly in the environment, and due to their low biodegradability they are persistent. Contamination of the aquatic environment is well documented for MTBE, but less for TAME and ETBE. In the 1990s MTBE was reported in groundwater and surface waters with increasing frequency, initially in the USA (Squillace et al., 1996; Happel et al., 1998; Johnson et al., 2000) and thereafter also in Europe (Achten et al., 2002; Klinger et al., 2002; Morgenstern

\* Corresponding author. Address: P.O. Box 1072, 3430BB Nieuwegein, The Netherlands. Tel.: +31 30 6069519; fax: +31 30 6061165.

E-mail address: [annemarie.van.wezel@kwrwater.nl](mailto:annemarie.van.wezel@kwrwater.nl) (A. van Wezel).

et al., 2003; Rosell et al., 2003, 2006; Arambarri et al., 2004; Kolb and Puttmann, 2006a,b). Tap water from various regions (USA, Germany and The Netherlands) was found to contain generally low ( $\text{ng L}^{-1}$ ) levels of MTBE (Deeb et al., 2003; Morgenstern et al., 2003; Kolb and Puttmann, 2006b; Cardinali et al., 2008).

A study in the Los Angeles area concluded that although alternative ether oxygenates (such as TAME and ETBE) are detected in groundwater beneath leaking underground fuel tanks less frequent and at lower concentrations than MTBE, these alternative ether oxygenates pose groundwater contamination threats similar to MTBE if their scale of use is expanded (Shih et al., 2004).

MTBE and other oxygenates dissolved in water, exhibit a potent and unpleasant odour for which the human olfactory system is highly sensitive. Odour and flavour thresholds of MTBE are low compared to other chemicals, ranging from 2.5 to  $190 \mu\text{g L}^{-1}$  and from 2.5 to  $680 \mu\text{g L}^{-1}$ , respectively, (Shen et al., 1997; Davis and Farland, 2001; ECB, 2002; WHO, 2005). For ETBE and TAME, hardly any information is available on odour and flavour thresholds in the open literature.

Toxicological effects of the oxygenates occur at much higher concentrations than the odour and flavour threshold (ECB, 2002, 2006). Therefore problems related to human health are not expected at the level of these thresholds. The EPA (1997) set a non-statutory drinking water advice for MTBE of  $20\text{--}40 \mu\text{g L}^{-1}$ . WHO considered setting a drinking water health-based guideline value unnecessary (Fawell, 2007). In The Netherlands, for MTBE a guideline for remediation of contaminated groundwater was advised of  $15 \mu\text{g L}^{-1}$  based on the odour threshold, whereas for ETBE no such indicative guideline could be advised thus far because reliable information on odour and flavour thresholds is lacking (TCB, 2007, 2008).

Consumers' perception of the presence of gasoline additives in drinking water sources might be negative. Because of their physical-chemical properties, removal of the fuel oxygenates is incomplete in routine drinking water treatment. A high concentration of gasoline additives in sources of drinking water will thus lead to problems for perception of drinking water quality by consumers.

The objective of this study was to determine odour and flavour thresholds of MTBE, ETBE and TAME, in order to complete the lacking information for ETBE and TAME, and to compare these thresholds to concentrations of MTBE and ETBE determined in thousands of samples collected from Dutch water collection areas for drinking water production, taking into account the geohydrological conditions of the collection areas. We hypothesize that an increased use of these gasoline additives will be reflected in increased concentrations in surface- and groundwaters. Comparing the concentrations observed in the drinking water sources with the odour and flavour thresholds gives an indication of the relevance for emission reduction measures for these gasoline additives.

## 2. Materials and methods

### 2.1. Panel test for odour and flavour thresholds of MTBE, ETBE and TAME

Odour and flavour thresholds of MTBE, ETBE and TAME were determined according to the European standard method EN 1622-1, a forced-choice paired test (CEN, 2006). In short, at least 8 panelists tested seven concentrations of MTBE, ETBE and TAME ranging between 0 and  $32 \mu\text{g L}^{-1}$ , prepared in odour and flavour free drinking water at a temperature of  $23^\circ\text{C}$ . The threshold is defined as the odourant/flavourant concentration which has a probability of 0.5 of being detected under the conditions of the test. Panelists were preliminary trained and experienced with the procedure.

### 2.2. Occurrence of MTBE and ETBE in Dutch water collection areas

Monitoring data of MTBE and ETBE in samples from water collection areas for drinking water production in the period 2002–2007 were collected from Dutch water companies and evaluated. MTBE and ETBE were analyzed by several laboratories using analytical purge and trap GC–MS based on ISO 15680. Water samples were conserved at  $1 \leq \text{pH} \leq 2$  with sulfuric acid.

The analyses included 11,680 and 1206 individual data for MTBE and ETBE, respectively, and included groundwater as well as surface water samples of in total 196 Dutch water collection areas for the production of drinking water. The water samples were not beforehand suspected of contamination related to historical soil contamination. Collection areas were classified depending on their geohydrological properties (see Table 1). The concentration of MTBE or ETBE in the collection area was classified as follows;  $<0.1$ ,  $0.1\text{--}1$ ,  $1\text{--}5$ ,  $5\text{--}15$ ,  $15\text{--}26$ ,  $26\text{--}260$ ,  $260\text{--}9400$  or  $>9400 \mu\text{g L}^{-1}$ . This classification was based on proposed guidelines for MTBE for environmental and health protection in The Netherlands (Swartjes et al., 2004). The highest concentration measured in each water collection area was used in the data evaluation.

Based on the Dutch contaminated soil database (Kernteam Landsdekkend Beeld, 2005; Van Wezel et al., 2008), 785 potentially contaminated sites were selected with (former) gas stations and fillings. The number of potentially contaminated sites per vulnerable water collection areas was determined by geographic information system analysis. To assess potential risks to raw water quality, traveling times of these sites to the water collection areas were calculated by interpolation of isochrones.

## 3. Results

Table 2 presents the odour and flavour thresholds derived in this study for MTBE, ETBE and TAME. Especially for ETBE, odour and flavour thresholds are low, at a level of  $1\text{--}2 \mu\text{g L}^{-1}$ . For MTBE and TAME the odour and flavour threshold are similar to each other, ranging from 7 to  $16 \mu\text{g L}^{-1}$ .

Table 3 presents data on the occurrence of MTBE in various types of water collection areas in The Netherlands. In general, water collection areas related to groundwaters are clean. However, at 20 freatic groundwater locations from sandy soils not covered by a protective top soil layer of clay, and in 16 groundwaters from sandy soil or limestone MTBE was found. In one groundwater collection area the observed concentration of MTBE exceeded the odour and flavour thresholds. In water from collection areas related to surface water MTBE was almost invariably detected. At a few locations for river bank and dune infiltrates, the concentration of MTBE exceeds the odour and flavour threshold (Table 3). MTBE concentrations measured repeatedly over time at a single location may vary from 4- to 15-fold (data not shown); however, the number of data available per location over time is too scarce to draw conclusions on temporal trends.

For ETBE, in use as a gasoline additive relatively short compared to MTBE, fewer monitoring data are available. Out of a total of 37 groundwater collection areas monitored, in two areas ETBE was detected in concentrations between 0.1 and  $1 \mu\text{g L}^{-1}$ . In all three water collection areas related to surface water that were monitored, ETBE was found in concentrations between 0.1 and  $1 \mu\text{g L}^{-1}$ . These ETBE concentrations are near to the odour and flavour thresholds determined in this study.

The number of potentially contaminated sites – which can act as a source of MTBE – per water collection area varies from one to up to 40 sites per vulnerable water collection area in urbanized regions (Fig. 1). All water collection areas mentioned in Table 1 are vulnerable for leakage from a source site, except for GW and SW. Travelling

**Table 1**

Water collection areas for production of drinking water, classification based on geohydrological properties.

Source: surface water	Source: ground water
SW: treated surface water (mainly from Rhine and Meuse)	GW: groundwater in sandy soil or limestone
SW <sub>infiltrate</sub> : artificially infiltrated surface water (mainly from Rhine and Meuse)	GW <sub>freatic sand</sub> : freatic groundwater in sandy soil
SW <sub>bank infiltrate</sub> : bank infiltrated surface water	GW <sub>freatic limestone</sub> : freatic groundwater in limestone or marl


**Table 2**

Physicochemical properties and odour and flavour thresholds of MTBE, ETBE and TAME (mean and 95% confidence interval).

Compound	Solubility <sup>a</sup> (g L <sup>-1</sup> )	Vapour pressure <sup>a</sup> (mm Hg)	log <i>K</i> <sub>ow</sub> <sup>a</sup>	Odour threshold (μg L <sup>-1</sup> )	Flavour threshold (μg L <sup>-1</sup> )
MTBE (C <sub>5</sub> H <sub>12</sub> O)	51	250	0.94	7 (5–10)	15 (9–34)
ETBE (C <sub>6</sub> H <sub>14</sub> O)	12	124	1.9	1 (0–4)	2 (0–4)
TAME (C <sub>6</sub> H <sub>14</sub> O)	2.6	75	1.9	8 (5–16)	16 (11–35)

<sup>a</sup> From [www.syrres.com](http://www.syrres.com).**Table 3**

MTBE concentrations in water collection areas.

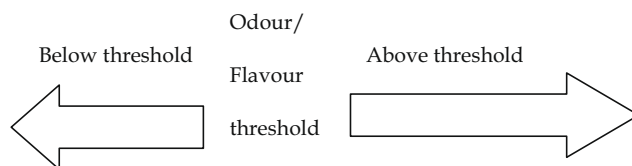


	C <sub>w</sub> (μg L <sup>-1</sup> )								N
	<0.1	0.1–1	1–5	5–15	15–26	26–260	260–9400	>9400	
GW <sub>freatic sand</sub>	43	14	6	–	–	–	–	–	63
GW	67	12	3	–	–	1	–	–	83
GW <sub>freatic limestone</sub>	9	–	–	–	–	–	–	–	9
SW <sub>bank infiltrate</sub>	4	13	2	1	–	1	1	–	22
SW <sub>infiltrate</sub>	2	3	–	–	–	–	–	–	5
SW	5	8	1	–	–	–	–	–	14
All water collection areas	130	50	12	1	0	2	1	0	196

times for MTBE (introduced in The Netherlands in 1988 as lead substitute in petrol) from potentially contaminated sites to water collection areas appear to be less than 20 years for the majority of potentially contaminated sites (data not shown). Thus, leakage problems are expected to be reflected in the current monitoring data.

#### 4. Discussion

The odour and flavour thresholds found in the current study for MTBE agree well with various literature values. For example, odour

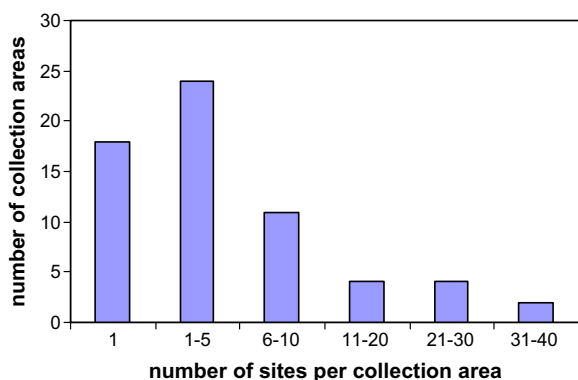

**Fig. 1.** Number of potentially contaminated sites which possibly act as source for MTBE per water collection area.

and flavour thresholds of 7 and 15 μg L<sup>-1</sup> found in the current study for MTBE are comparable with literature values such as 34 and 48 μg L<sup>-1</sup> for odour and flavour, respectively (Young et al., 1996), 43–71 (odour) and 24–37 (flavour) μg L<sup>-1</sup> (Dale et al., 1997), 15 μg L<sup>-1</sup> for both odour and flavour (Pirnie, 1998; Stocking et al., 2001), 18 μg L<sup>-1</sup> for odour (Campden 2003, presented in Sufet, 2007) and 7.4 (odour) and 7.3 (flavour) μg L<sup>-1</sup> (Danish EPA, 2000). Prah et al. (1994) reported a much higher odour threshold value of 180 μg L<sup>-1</sup>.

For TAME there are few literature data available: indicative odour and flavour thresholds of 443 and 128 μg L<sup>-1</sup> were determined in distilled water (Vetrano, 1993) and taste and odour thresholds of 128 and 27 μg L<sup>-1</sup> were reported (EPA, 1999; DNREC, 2001, both references do not refer to the original data source). For ETBE, an odour threshold between 13 and 25 and a taste threshold of 47 μg L<sup>-1</sup> were reported (EPA, 1999; EFOA, 2006, both references do not refer to the original data source). For both TAME and ETBE, the thresholds observed in the current study are lower than the scarce literature data available.

From 2000 to 2003 on, respectively, concentrations of MTBE and ETBE have been monitored in the Dutch part of the river Rhine at Lobith. The mean concentrations in 2006 were 0.41 (*n* = 363) and 0.23 (*n* = 325) μg L<sup>-1</sup>, respectively (RIWA, 2006, 2007, 2008). However, contamination with higher concentrations of MTBE and ETBE in the river Rhine occurs frequently, due to spills and shipping, as is apparent from frequently reported incidents in the Rhine alarm system (RIWA, 2006, 2007, 2008, [www.aqualarm.nl](http://www.aqualarm.nl)). As

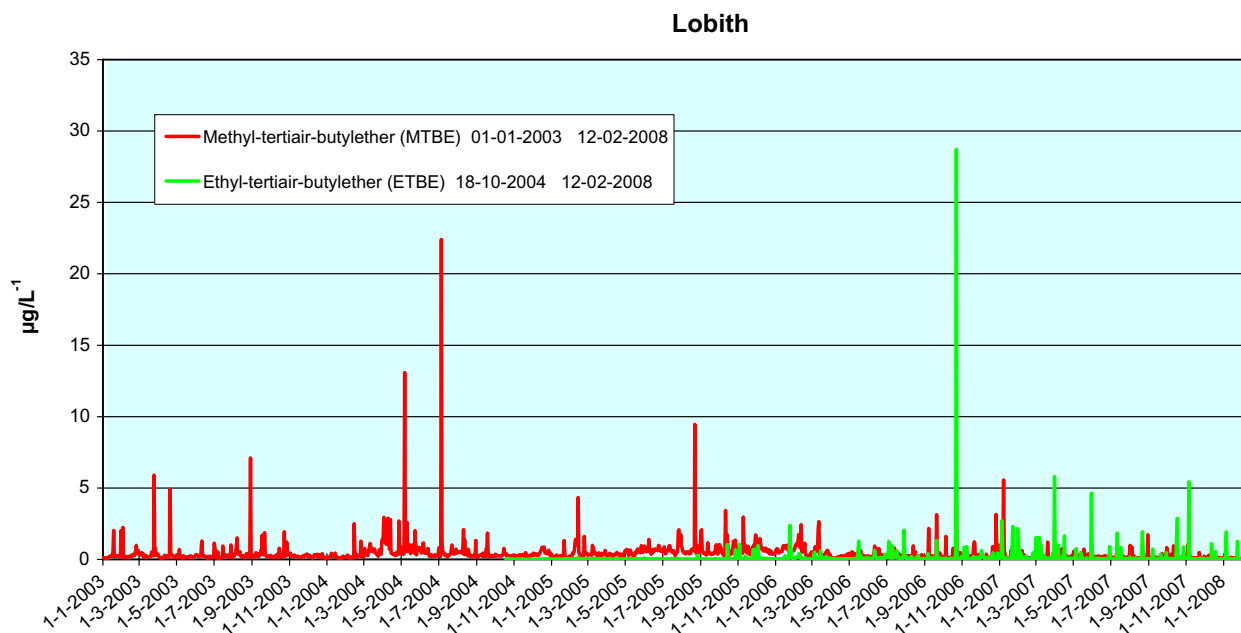


Fig. 2. Concentrations of MTBE and ETBE in surface water of the Rhine at Lobith (2003–2008, data from RIWA).

shown in Fig. 2 for Lobith, in the past few years peak concentrations of ETBE occur more frequently. The flavour and odour threshold established for ETBE in the current study is exceeded regularly in the Rhine, whereas the threshold value for MTBE is exceeded occasionally.

Median and average levels of MTBE in the river Scheldt in the period 2001–2004 are similar to those observed in the Rhine, but maximum levels did not exceed  $0.8 \mu\text{g L}^{-1}$  (Van den Berg and Puijker, 2005). The concentrations of MTBE in the river Meuse showed high seasonal fluctuations with concentrations exceeding  $1 \mu\text{g L}^{-1}$  during periods of low river flows and levels below the detection limit at high river discharges (Van den Berg and Puijker, 2005). In the river Meuse the maximum concentration of MTBE reported amounted to  $45 \mu\text{g L}^{-1}$  (location Roosteren; RIWA, 2005), due to leakages from the petrol industry. In German rivers maximum concentrations of MTBE are reported of  $2.4 \mu\text{g L}^{-1}$  within urbanized areas, with occasionally peaks up to concentrations of  $14 \mu\text{g L}^{-1}$  due to incidental illegal spilling (Baus et al., 2005). However, the average concentration of MTBE reported in the downstream parts of the German Rhine amounts to  $0.25 \mu\text{g L}^{-1}$  (Achten et al., 2002) which is somewhat lower than in The Netherlands.

In shallow water systems, as occur in The Netherlands, groundwater and surface water are strongly interconnected. Thus, contamination of surface waters is reflected after some delay in groundwater quality. The concentrations of MTBE in several of the groundwater samples reported in the current study are relatively high compared to literature sources as reviewed by Rosell et al. (2006) – reporting a median concentration of  $0.3 \mu\text{g L}^{-1}$  in USA and  $0.17 \mu\text{g L}^{-1}$  in Germany. In Germany, MTBE occurs in groundwater also especially in urbanized areas at median concentrations of  $0.18 \mu\text{g L}^{-1}$  (Kolb and Puttmann, 2006a).

For the occurrence of ETBE and TAME in groundwater hardly any literature data are available (Rosell et al., 2006), although physicochemical models are available to predict groundwater concentrations (Snelling et al., 2007). Shih et al. (2004) reported on groundwater concentrations of MTBE, ETBE and TAME below leaking underground fuel tanks in the Los Angeles region. They found median groundwater concentrations of, respectively, 1200, 4 and  $20 \mu\text{g L}^{-1}$  reflecting the dominant use of MTBE compared to alter-

native ether oxygenates. These data on heavily contaminated groundwaters are not comparable to the current study where we focused on water collection areas which were not suspected of contamination beforehand.

Both MTBE and ETBE may permeate from groundwater across piping material made of polyethylene into drinking water, but drinking water concentrations will only be significant at very high groundwater concentrations (exceeding  $100 \mu\text{g L}^{-1}$ ; Meerkerk, 2008).

Although challenging due to its physicochemical properties, techniques are available to remove MTBE from groundwater (reviewed by Kolb and Puttmann, 2006b), for example aeration or photodegradation by UV/H<sub>2</sub>O<sub>2</sub> and UV/TiO<sub>2</sub> (Hu et al., 2008). In Germany, concentrations in various finished drinking waters remained below  $0.8 \mu\text{g L}^{-1}$ , with a median concentration of  $0.37 \mu\text{g L}^{-1}$  (Kolb and Puttmann, 2006b).

Partly on the basis of results from the current study, the Dutch Ministry of Housing, Spatial Planning and the Environment recently set a value for remediation of  $1 \mu\text{g L}^{-1}$  within drinking water collection areas for MTBE and ETBE, in accordance with the precautionary principle and the existing drinking water legislation. Outside drinking water collection areas a value of  $15 \mu\text{g L}^{-1}$  was set (Ministry of VROM, 2008).

## 5. Conclusions

In the present study concentrations of MTBE, ETBE and TAME in water from water extraction areas used for drinking water production in The Netherlands were compared to their odour and flavour thresholds determined through new panel tests. The presence of MTBE was particularly observed in aquifers with substantial infiltration of surface waters, and in phreatic aquifers in urban areas. The study shows that in areas where surface water serves directly or indirectly (e.g. after bank filtration) as the drinking water resource, MTBE and ETBE levels may exceed the olfactory thresholds. The low odour and flavour thresholds combined with the high mobility and persistence of these compounds and their high and increasing use, can force drinking water companies to develop re-



moval steps in order to produce a drinking water quality that will be accepted by its consumers. Human health problems other than olfactory well-being are not expected since the ambient levels of MTBE and other oxygenates observed in water in this study are far below levels that can be toxic to humans.

## Acknowledgments

Thanks are due to Nanda Berg, Linda van Rooijen, Hans van der Jagt and the panelists for the panel tests, and to Theodor van der Kooij for analyzing the monitoring data. Water companies and VE-WIN are acknowledged for the supply of monitoring data, and Hub Schouteten for commenting the manuscript. The National Institute for Public Health and the Environment, the Ministry of Housing, Spatial Development and the Environment and SenterNovem are acknowledged for their financial support.

## References

- Achten, C., Kolb, A., Puttmann, W., Seel, P., Gehr, R., 2002. Methyl *tert*-butyl ether (MTBE) in river and wastewater in Germany. *Environ. Sci. Technol.* 36, 3652–3661.
- Arambarri, I., Laso, M., Garcia, R., Millan, E., 2004. Determination of fuel dialkyl ethers and BTEX in water using headspace solid-phase microextraction and gas chromatography–flame ionization detection. *J. Chromatogr. A* 1033, 193–203.
- Baus, C., Hung, H., Sacher, F., Fleig, M., Brauch, H.J., 2005. MTBE in drinking water production – occurrence and efficiency of treatment technologies. *Acta Hydrochim. Hydrobiol.* 33, 118–132.
- Cardinali, F.L., Blount, B.C., Schmidt, R., Morrow, J., 2008. Measurement of fuel oxygenates in tap water using solid-phase microextraction gas chromatography–mass spectrometry. *J. Chromatogr. Sci.* 46, 381–387.
- CEN, 2006. EN 1622: Water Quality – Determination of the Threshold Odour Number and the Threshold Flavour Number. European Standard. European Commission on Normalisation, Brussels.
- Dale, M.S., Moylan, M.S., Koch, B., and Davis, M.K., 1997. MTBE: Taste-and-odor Threshold Determinations Using the Flavor Profile Method. Presentation. In: Water Quality Technology Conference of the American Water Works Association, November 1997, Denver, CO.
- Danish, EPA, 2000. Taste/odour Study on MTBE Performed by ISO-Method with Measured Concentrations. Danish Environmental Agency, Copenhagen.
- Davis, J.M., Farland, W.H., 2001. The paradoxes of MTBE. *Toxicol. Sci.* 61, 211–217.
- Deeb, R.A., Chu, K.H., Shih, T., Linder, S., Suffet, I., Kavanaugh, M.C., Alvarez-Cohen, L., 2003. MTBE and other oxygenates: environmental sources, analysis, occurrence, and treatment. *Environ. Eng. Sci.* 20, 433–447.
- DeWitt & Company Inc., 2000. MTBE and Oxygenates 2000 Annual. Houston, Texas.
- DNREC, 2001. UST Branch Announces New Analytical Requirements for TAME and TBA. ThinkTank 34, 1–2. <<http://www.dnrec.state.de.us/dnrec2000/divisions/awm/ust/thinktank/PDF/tt34.pdf>> (accessed 12.08.08).
- EC, 2005. New and Renewable Energy. European Commission, Directorate-General for Energy and Transport, B-1049 Bruxelles, Belgium.
- ECB, 2002. European Risk Assessment Report on Tert-butyl Methyl Ether. European Chemicals Bureau, Italy.
- ECB, 2006. European Risk Assessment Report on 2-Methoxy 2-Methyl Butane (TAME). European Chemicals Bureau, Italy.
- EFOA, 2006. ETBE Technical Product Bulletin, European Fuel Oxygenates Association, Brussels. <[www.efoa.org/docs/ETBE\\_PRODUCT\\_BULLETIN\\_JUN\\_2006.PDF](http://www.efoa.org/docs/ETBE_PRODUCT_BULLETIN_JUN_2006.PDF)> (accessed 12.08.08).
- EPA, 1997. Drinking Water Advisory, Consumer Acceptable Advice and Health Effects Analysis on Methyl tertiary-butyl Ether (MtBE). US Environmental Protection Agency, Washington, DC, USA.
- EPA, 1999. The Blue Ribbon Panel Report on Oxygenates in Gasoline. EPA420-R-99-021. US Environmental Protection Agency, Washington, DC, USA.
- Fawell, J., 2007. MTBE: WHO guidelines and taste and odour issues for drinking water. In: Barcelo, D. (Ed.), *The Handbook of Environmental Chemistry*, 5R. Springer-Verlag, Berlin Heidelberg, pp. 401–408.
- Happel, A.M., Beckenbach, E.H., Halden, R.U., 1998. An Evaluation of MTBE Impacts to California Groundwater Resources, UCLA-AR-130897. Environmental Protection Department, Lawrence Livermore National Laboratory, University of California, Livermore.
- Hu, Q., Zhang, C., Wang, Z., Chen, Y., Mao, K., Zhang, X., Xiong, Y., Zhu, M., 2008. Photodegradation of methyl-*tert*-butyl ether (MTBE) by UV/H<sub>2</sub>O<sub>2</sub> and UV/TiO<sub>2</sub>. *J. Hazard. Mater.* 154, 795–803.
- Johnson, R., Pankow, J., Bender, D., Price, C., Zogorski, J., 2000. MTBE–To what extent will past releases contaminate community water supply wells? *Environ. Sci. Technol.* 34, 2A–9A.
- Kernteam Landsdekkend Beeld. 2005. Eindrapport Nulmeting Werkvoorraad Bodemsanering (in Dutch). <[www.senter.nl](http://www.senter.nl)>.
- Klinger, J., Stieler, C., Sacher, F., Brauch, H.-J., 2002. MTBE (methyl tertiary-butyl ether) in groundwaters: Monitoring results from Germany. *J. Environ. Monitor.* 4, 276–279.
- Kolb, A., Puttmann, W., 2006a. Comparison of MTBE concentrations in groundwater of urban and nonurban areas in Germany. *Water Res.* 40, 3551–3558.
- Kolb, A., Puttmann, W., 2006b. Methyl-*tert*-butyl ether (MTBE) in finished drinking water in Germany. *Environ. Pollut.* 140, 294–303.
- Krayer von Krauss, M., Harremoës, P., 2001. MTBE in petrol as a substitute for lead. In: Harremoës, P., MacGarvin, M., Stirling, A., Keys, J., Wynne, B., Vaz, S.G. (Eds.), *Late Lessons From Early Warnings. Environmental Issue Report. European Environmental Agency, Copenhagen* (Chapter 11).
- Meerkerk, M.A., 2008. The Permeation of MTBE and ETBE through Various Piping Materials. KWR Report 08.022. Kiwa Water Research, Nieuwegein, The Netherlands (in Dutch).
- Ministry of VROM, 2008. Application of duty for concern from soil regulation on MTBE and ETBE contamination. *State Journal* Nr. 2139.
- Morgenstern, P., Versteegh, A.F.M., De Korte, G.A.L., Hoogerbrugge, R., Mooibroek, D., Bannink, A., Hogendoorn, E.A., 2003. Survey of the occurrence of residues of MTBE in Dutch drinking water sources and drinking water. *J. Environ. Monitor.* 5, 885–890.
- Pirnie, M., 1998. Taste and Odor Properties of Methyl Tertiary-butyl Ether and Implications for Setting a Secondary Maximum Contaminant Level. Oxygenated Fuels Association, Washington, USA.
- Prah, J.D., Goldstein, G.M., Devlin, R., Otto, D., Ashley, D., House, D., Cohen, K.L., Gerrity, T., 1994. Sensory, symptomatic, inflammatory, and ocular responses to, and the metabolism of, methyl tertiary butyl ether in a controlled human exposure experiment. *Inhal. Toxicol.* 6, 521–538.
- RIWA, 2005. Annual Report 2005. RIWA-Maas/Meuse, Nieuwegein, The Netherlands. <[www.riwa-maas.nl](http://www.riwa-maas.nl)>.
- RIWA, 2006. Annual Report 2005, The Rhine. RIWA-Rijn, Nieuwegein, The Netherlands (in Dutch). <[www.riwa-rijn.org](http://www.riwa-rijn.org)>.
- RIWA, 2007. Annual Report 2006, The Rhine. RIWA-Rijn, Nieuwegein, The Netherlands (in Dutch). <[www.riwa-rijn.org](http://www.riwa-rijn.org)>.
- RIWA, 2008. Annual Report 2007, The Rhine. RIWA-Rijn, Nieuwegein, The Netherlands (in Dutch). <[www.riwa-rijn.org](http://www.riwa-rijn.org)>.
- Rosell, M., Lacorte, S., Ginebreda, A., Barcelo, D., 2003. Simultaneous determination of methyl *tert*-butyl ether and its degradation products, other gasoline oxygenates and benzene, toluene, ethylbenzene and xylenes in Catalonian groundwater by purge-and-trap-gas chromatography–mass spectrometry. *J. Chromatogr. A* 995, 171–184.
- Rosell, M., Lacorte, S., Barcelo, D., 2006. Analysis, occurrence and fate of MTBE in the aquatic environment over the past decade. *Trends Anal. Chem.* 25, 1016–1029.
- Shen, Y.F., Yoo, L.J., Fitzsimmons, S.R., Yamamoto, M.K., 1997. Threshold odor concentrations of MTBE and other fuel oxygenates. Paper Presented at the 213th American Chemical Society National Meeting, Division of Environmental Chemistry, San Francisco, CA, 37, 407–409.
- Shih, T., Rong, Y., Harman, T., Suffet, M., 2004. Evaluation of the impact of fuel hydrocarbons and oxygenates on groundwater resources. *Environ. Sci. Technol.* 38, 42–48.
- Snelling, J., Barnett, M., Zhao, D., Arey, S., 2007. Methyl-*tert*-hexyl ether and methyl-*tert*-octyl ether as gasoline oxygenates: anticipating widespread risks to community water supply wells. *Environ. Toxicol. Chem.* 26, 2253–2259.
- Squillace, J.P., Zogorski, J.S., Wilber, W.G., Price, C.V., 1996. Preliminary assessment of the occurrence and possible sources of MTBE in groundwater in the United States. *Environ. Sci. Technol.* 30, 1721–1730.
- Stocking, A.J., Suffet, I.H., McGuire, M.J., Kavanaugh, M.C., 2001. Implications of an MTBE odor study for setting drinking water standards. *J. Am. Water Works Assoc.* 93 (3), 95–105.
- Suffet, I.H., 2007. A re-evaluation of the taste and odour of methyl tertiary butyl ether (MTBE) in drinking water. *Water. Sci. Technol.* 55 (5), 265–273.
- Swartjes, F., Baars, A., Fleuren, R., Otte, P., 2004. Risk Limits for MTBE (Methyl-*tert*-butyl Ether) for Soil, Sediment, Groundwater, Surface Water, Drinking Water and Drinking Water Production. RIVM report 711701039. National Institute for Health and the Environment, Bilthoven, The Netherlands (in Dutch). <[www.rivm.nl](http://www.rivm.nl)>.
- TCB, 2007. Advisory Report MTBE Standards. S45e, Technical Committee on Soil Protection, The Hague, The Netherlands. <[www.tcbodem.nl/english](http://www.tcbodem.nl/english)>.
- TCB, 2008. Advisory Report ETBE Standards. A040e, Technical Committee on Soil Protection, The Hague, The Netherlands. <[www.tcbodem.nl/english](http://www.tcbodem.nl/english)>.
- Van den Berg, G.A., Puijker, L.M., 2005. Occurrence of MTBE in Dutch Surface Water. KWR report 04.099. Kiwa Water Research, Nieuwegein, The Netherlands (in Dutch).
- Van Wezel, A.P., Franken, R.O.G., Drissen, E., Versluijs, K.C.W., Van den Berg, R., 2008. Societal cost-benefit analysis for soil remediation in The Netherlands. *Interg. Environ. Assess. Manage.* 4, 61–74.
- Vetrano, K., 1993. Odor and Taste Threshold Studies Performed with TAME. TRC 4591. Environmental Corporation Publication, Windsor, USA.
- Vierhout, R., 2005. Challenges for the EU Bio-ethanol Fuel Industry. European Bioethanol Fuel Association, Brussels. <[www.ebio.org](http://www.ebio.org)> (accessed 05.08.2008).
- WHO, 2005. MTBE in Drinking Water. Background Document for Development of WHO Guidelines for Drinking-water Quality. WHO/SDE/WSH/05.08/122. Geneva.
- Young, W.F., Horth, H., Crane, R., Ogden, T., Arnon, M., 1996. Taste and odour concentrations of potential potable water contaminants. *Water Res.* 30, 331–340.