



UvA-DARE (Digital Academic Repository)

Solubility of sulfur compounds in commercial physical solvents and an ionic liquid from Monte Carlo simulations

Jamali, S.H.; Ramdin, M.; Becker, T.M.; Torres-Knoop, A.; Dubbeldam, D.; Buijs, W.; Vlugt, T.J.H.

DOI

[10.1016/j.fluid.2016.11.015](https://doi.org/10.1016/j.fluid.2016.11.015)

Publication date

2017

Document Version

Final published version

Published in

Fluid Phase Equilibria

License

Article 25fa Dutch Copyright Act (<https://www.openaccess.nl/en/in-the-netherlands/you-share-we-take-care>)

[Link to publication](#)

Citation for published version (APA):

Jamali, S. H., Ramdin, M., Becker, T. M., Torres-Knoop, A., Dubbeldam, D., Buijs, W., & Vlugt, T. J. H. (2017). Solubility of sulfur compounds in commercial physical solvents and an ionic liquid from Monte Carlo simulations. *Fluid Phase Equilibria*, 433, 50-55. <https://doi.org/10.1016/j.fluid.2016.11.015>


General rights

It is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), other than for strictly personal, individual use, unless the work is under an open content license (like Creative Commons).

Disclaimer/Complaints regulations

If you believe that digital publication of certain material infringes any of your rights or (privacy) interests, please let the Library know, stating your reasons. In case of a legitimate complaint, the Library will make the material inaccessible and/or remove it from the website. Please Ask the Library: <https://uba.uva.nl/en/contact>, or a letter to: Library of the University of Amsterdam, Secretariat, Singel 425, 1012 WP Amsterdam, The Netherlands. You will be contacted as soon as possible.

UvA-DARE is a service provided by the library of the University of Amsterdam (<https://dare.uva.nl>)



Solubility of sulfur compounds in commercial physical solvents and an ionic liquid from Monte Carlo simulations



Seyed Hossein Jamali ^a, Mahinder Ramdin ^a, Tim M. Becker ^a, Ariana Torres-Knoop ^b, David Dubbeldam ^b, Wim Buijs ^a, Thijs J.H. Vlugt ^{a,*}

^a Engineering Thermodynamics, Process & Energy Department, Faculty of Mechanical, Maritime and Materials Engineering, Delft University of Technology, Leeghwaterstraat 39, 2628CB, Delft, The Netherlands

^b Van 't Hoff Institute of Molecular Sciences, University of Amsterdam, Science Park 904, 1098XH, Amsterdam, The Netherlands

ARTICLE INFO

Article history:

Received 25 August 2016

Received in revised form

12 November 2016

Accepted 19 November 2016

Available online 21 November 2016

Keywords:

Molecular simulation

Natural gas

Carbon capture

Acidic gases

Sulfur compounds

Osmotic ensemble

ABSTRACT

Natural gas, synthesis gas, and flue gas typically contain a large number of impurities (e.g., acidic gases), which should be removed to avoid environmental and technological problems, and to meet customer specifications. One approach is to use physical solvents to remove the acidic gases. If no experimental data are available, the solubility data required for designing the sweetening process can be obtained from molecular simulations. Here, Monte Carlo (MC) simulations are used to compute the solubility of the gas molecules, i.e., carbonyl sulfide, carbon disulfide, sulfur dioxide, hydrogen sulfide, methyl mercaptan, carbon dioxide, and methane in the commercial solvents tetraethylene-glycol-dimethyl-ether (Selexol), n-methyl-2-pyrrolidone, propylene carbonate, methanol (Rectisol), and the ionic liquid 1-butyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide ([bmim][Tf₂N]). Henry coefficients of the gases in the investigated solvents are obtained from the computed solubilities. The ratio of Henry coefficients is used to compute ideal selectivities of the solvents. The solubilities and selectivities computed from MC simulations are compared with available experimental data. Some guidelines are provided to remove acidic gases using the investigated solvents. Rectisol is the best solvent for acid gas removal, but it should be used at low temperatures. Selexol and the ionic liquid have similar selectivity of sulfur compounds with respect to methane and may be used at elevated pressures and temperatures since both have low vapor pressures. The solubility of carbon disulfide, sulfur dioxide, and methyl mercaptan in these solvents is the highest. Hence, these components can be removed easily prior to hydrogen sulfide, carbonyl sulfide, and carbon dioxide in a pre-absorber.

© 2016 Elsevier B.V. All rights reserved.

1. Introduction

Natural gas typically contains a wide range of light hydrocarbons, sulfur and nitrogen compounds, and other inorganic molecules [1]. The presence of acidic gases in natural gas, in particular sulfur compounds, is a major concern because of their corrosivity, toxicity, and ability to deactivate catalysts [2,3]. Therefore, it is essential to remove these components before the natural gas is further processed. Typical sulfur compounds in natural gas are hydrogen sulfide (H₂S), sulfur dioxide (SO₂), carbonyl sulfide (COS), carbon disulfide (CS₂), and organic sulfur compounds such as mercaptans (RSH) [1]. These components can be inherently present

in natural gas or can be produced during the processing of the gas or after burning sulfur-containing fuels. The aim of natural gas separation is to obtain pure light hydrocarbons [3]. This means that the acidic gases, i.e., CO₂ and sulfur compounds, have to be reduced substantially without removing valuable products such as methane.

Typically, these acidic components are removed using physical, chemical, or hybrid solvents [4] as well as other methods like membrane separation and cryogenic fractionation [5]. Chemical solvents react with solutes (CO₂, H₂S, etc.) and the solute-rich solvent is regenerated by applying heat. In contrast, physical solvents do not react, but physically absorb acidic gases. At high pressures, the acidic gases dissolve in the solvent, which is regenerated by reducing the pressure (flashing) or applying heat. Compression of the feed gas for acid gas removal is not economic unless the acidic gases have high partial pressures [4]. Therefore,

* Corresponding author.

E-mail address: t.j.h.vlugt@tudelft.nl (T.J.H. Vlugt).

physical solvents are attractive when acidic gases constitute a large fraction of the feed gas with high partial pressures (50–100 psi) whereas chemical solvents are appropriate for removing acidic gases with low partial pressures (10–15 psi) [4].

The main industrial chemical solvents for removing acidic gases cover a wide range of fluids such as amines (e.g., monoethanolamine (MEA), dimethylethanolamine (DMEA), and diisopropylamine (DIPA)), activated hot potassium carbonate [4]. The main industrial physical solvents considered for acid gas removal are propylene carbonate (PC, Fluor solvent process), N-methyl-2-pyrrolidone (NMP, Purisol process), methanol (Rectisol process), and polyethylene-glycol-dimethyl-ether (Selexol process) [1]. Hybrid processes utilize physical and chemical solvents to combine the advantages of both types. For instance, in the Sulfinol process, sulfolane is used as a physical solvent to remove the bulk of the acidic gases while DIPA chemically absorbs the remaining impurities.

A comprehensive discussion about commercial solvents, their processes along with their advantages and disadvantages is available in the book by Kohl and Nielsen [1]. Polyethylene-glycol-dimethyl-ether (DEPG) with the structural formula $\text{CH}_2\text{O}(-\text{C}_2\text{H}_4\text{O})_n\text{CH}_3$ (n between 3 and 9) is a solvent used in various commercial processes such as Selexol and Coastal AGR. Here, whenever the term Selexol is used, it refers to DEPG. Selexol has not only a high affinity for H_2S , but also absorbs CO_2 , mercaptans, COS, and other sulfur compounds [1,5]. Selexol has a high viscosity, so it is preferably used at high temperatures. The operating temperature of the process ranges from 0 °C up to 175 °C. In the Purisol process, NMP is used as a physical solvent to remove acidic gases. NMP has the highest $\text{H}_2\text{S}/\text{CO}_2$ selectivity among the commercial physical solvents [5]. Unfortunately, NMP has the highest vapor pressure at its working temperature compared to the other physical solvents, which is a major drawback. Therefore, NMP recovery may be necessary to prevent solvent losses through the process [5]. The working temperature of NMP ranges from –15 °C up to ambient temperatures. The processes known as “Rectisol”, “Ilfexol”, etc. use methanol as the physical solvent [1]. Hereafter, whenever the term Rectisol is used, it refers to methanol. Rectisol is mainly used for synthesis gas purification, and it can separate H_2S from CO_2 [1]. The vapor pressure of methanol at room temperature is high. Therefore, Rectisol is often applied at relatively low temperatures between –70 °C and 0 °C [5]. This requires a huge refrigeration load, which makes the process expensive. Unless a high H_2S selectivity is required, this process is not economically appealing because of its high capital and operational costs [5]. PC is the physical solvent of the Fluor solventSM process [1]. PC is an appropriate solvent if CO_2 is the main component to be removed and if little H_2S is present in the raw gas. PC has a higher vapor pressure than Selexol, but it is not necessary to utilize solvent recovery. Typical operating temperatures of this process are between –18 °C and 65 °C.

In recent years, ionic liquids (ILs) have been extensively investigated for natural gas or syngas sweetening purposes [6,7] as well as for carbon capture [6,8–13]. Most of the ILs have a very low vapor pressure, high chemical and thermal stability, low flammability, and relatively high acid gas capacities [6]. One of the prominent properties of ILs is their tunability that allows the design of application-specific ILs by changing the nature of the cations and anions. Here, we selected [bmim][TF_2N] as a reference IL and a comparison of its performance for acid gas removal with respect to the commercial solvents is provided.

The design of an acid gas removal process requires solubility data of all the components present in the natural gas or syngas for a wide range of temperatures and pressures. As stated in the book by Kohl and Nielsen [1]: “The key requirement is adequate liquid/

vapor equilibrium data covering all components and conditions encountered in the process.” However, for some of the components such as mercaptans, there is little or no experimental vapor-liquid equilibrium (VLE) data available. In general, it is difficult to experimentally measure the VLE of toxic and corrosive compounds (i.e., sulfur compounds) [6]. In these cases, computational methods, e.g., Monte Carlo simulations, play an important role in providing the required VLE data. This study is a supplement to our previous experimental and simulation work, focused mainly on CO_2/CH_4 solubilities and selectivities [6,8–13]. Here, we focus on the solubility and the selectivity of sulfur compounds. As it will be shown later, there is almost no experimental data for some of the sulfur compounds in conventional physical solvents. Obtaining solubility data for these compounds can be helpful for designing more accurate processes.

In this work, we investigate the solubility of sulfur compounds (H_2S , CS_2 , COS, SO_2 , and methyl mercaptan (CH_3SH)) as well as their ideal selectivities with respect to methane and CO_2 in physical solvents by Monte Carlo (MC) simulations using RASPA, a molecular simulation software package [14,15]. The commercial physical solvents considered in this study are PC, NMP, Selexol, and methanol. Since the main component of Selexol is tetraethylene-glycol-dimethyl-ether (TTEGDME, $n = 4$), simulations are carried out exclusively for this component. The results of MC simulations are compared with available experimental data and predictions from the Peng–Robinson equation of state (PR EoS).

This paper is organized as follows. In Section 2, we describe the details of the conducted MC simulations. In Section 3, the simulation results are presented and compared with available experimental data. The solubility data are used to compute the Henry coefficient of the gases in the solvents. Subsequently, the Henry coefficients are used to calculate ideal selectivities, which are required to assess the performance of a solvent. Based on the computed data, we provide some guidelines to remove acidic gases from natural gas or flue gas.

2. Simulation details

Monte Carlo simulations are performed in the osmotic ensemble where the number of solvent molecules, temperature, and pressure of the simulation box are kept constant [7,12,13,16–23]. The vapor pressure of the investigated solvents at their operating temperature is negligible which makes it possible to consider them as non-volatile liquids in simulations. The solute molecules can be exchanged with an open reservoir having the same pressure, temperature, and fugacity of the solute in the simulation box [16]. Three types of trial moves are considered for the solvent: translation, rotation, and partial reinsertion (to take into account the internal degrees of freedom of flexible molecules). There are three types of trial moves for the solute: translation, rotation, and exchange with the open reservoir. The exchange trial move is performed by the Continuous Fractional Component MC (CFCMC) method since the high density of the mixture makes it difficult for efficient insertion of new solute molecules [17–20,24]. When computing the loading, the fractional molecule is disregarded [25]. A volume change trial move is used to regulate the pressure of the system. For more details on the Monte Carlo simulation methodology, the reader is referred to the book by Frenkel and Smit [26].

The simulation temperature is fixed at 60 °C, except for Rectisol which is –25 °C due to its high vapor pressure at the ambient temperature. All simulations are started with an equilibration run to ensure that the number of solutes, the energy level, and other properties of the system fluctuate around their average values. After reaching equilibrium, the Wang-Landau scheme [27,28] is applied to obtain the biasing factors for the CFCMC method [17].

Once the biasing factors are fixed, production simulations with at least half a million MC cycles are carried out to obtain the statistical averages such as the average number of the solute molecules dissolved in the solvent. The number of MC moves in each MC cycle is equal to the total number of molecules in the simulation box. The size of the box is more than twice the cutoff radius, which is on average 26 Å. The number of solvent molecules in the simulation box is computed from the box size and experimental densities of the solvents.

Various force fields have been used for the solutes (CH₃SH [29], CO₂ [30], COS [31], CS₂ [32], H₂S [33], SO₂ [34], and CH₄ [35]) and the solvents (Rectisol [36], Selexol [37], PC [38], NMP [39], and [bmim][Tf₂N] [40]). Intramolecular interactions for all gas molecules are omitted (the solutes are considered rigid with fixed bonds and bond angles). The solvents NMP and PC are considered rigid while Selexol, Rectisol, and the ionic liquid are flexible in this study. Nonbonded interactions are described by electrostatic and Lennard-Jones (LJ) potentials. The Ewald summation method is used with a relative precision of 10⁻⁵ for long-range electrostatic interactions [26]. All LJ potentials are truncated at a cutoff radius of 12 Å including analytical tail corrections. The Lorentz-Berthelot mixing rules are applied for the interaction between dissimilar atoms. We note that, for instance, the TraPPE force field uses a cutoff radius of 14 Å and analytical tail corrections [41]. However, we use a cutoff radius of 12 Å for nonbonded interactions in this work. The advantage of using a cutoff radius of 12 Å over 14 Å is the substantial decrease in computational time. We show in Section S3 of the Supplementary Content that MC simulations using a cutoff radius of 12 Å including analytical tail corrections can correctly reproduce experimental vapor-liquid equilibrium (VLE) diagrams of the pure components. For COS and PC, some missing force field parameters (i.e., partial atomic charges and positions) have been obtained from standard DFT (quantum mechanics) calculations as discussed in Section S3 of the Supplementary Content. The force field functional forms are shown in Section S2 of the Supplementary Content and all force field parameters for bonded and nonbonded interactions are listed in Tables S1 to S12.

3. Results and discussion

We computed the solubility of H₂S, COS, CS₂, CH₃SH, SO₂, CO₂, and CH₄ in the 4 conventional physical solvents and the ionic liquid using Monte Carlo simulations. As mentioned in Section 2, the VLE diagrams and densities of pure components are calculated to validate the employed force field using MC simulations in the Gibbs and NPT ensembles, respectively [42–44]. The results of these simulations are illustrated in Figs. S4–S16 of the Supplementary Content. In general, the VLE diagrams of the pure components are in good agreement with experimental data. The same force field parameters have been used for the simulation of the binary mixtures in the osmotic ensemble.

Only a selected number of systems will be presented in the main text, but all solubility results can be found in Tables S16–S20 of the Supplementary Content. Simulations performed with or without analytical tail corrections, see Figs. S4–S16 of the Supplementary Content, yield a significant difference in the solubility results. Therefore, we use analytical tail corrections in all simulations as prescribed in the original force fields. In Fig. 1, the solubility of the sulfur compounds in the ionic liquid is shown as an example. It is clearly visible that the solubility of H₂S and COS is lower than the solubility of SO₂, CH₃SH, and CS₂ in the ionic liquid. This difference in solubility provides the required selectivity to efficiently separate H₂S and COS from the rest of the sulfur compounds.

The solubilities of H₂S and SO₂ in all solvents are shown in Figs. 2 and 3, respectively. It is clear that all solvents are more selective

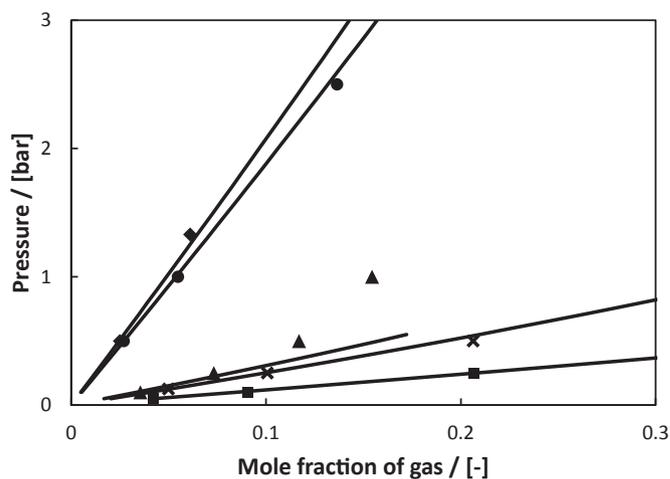


Fig. 1. Solubility of acidic gases, COS (closed circles), SO₂ (closed triangles), CS₂ (closed squares), CH₃SH (crosses), and H₂S (closed diamonds) molecules, in the ionic liquid [bmim][Tf₂N] at 333.15 K. The lines are fitted to the PR EOS. The fitted parameters are available in Table S15 of the Supplementary Content. The PR EOS with the van der Waals mixing rule is not able to accurately model the SO₂ solubility in the ionic liquid and Selexol [49].

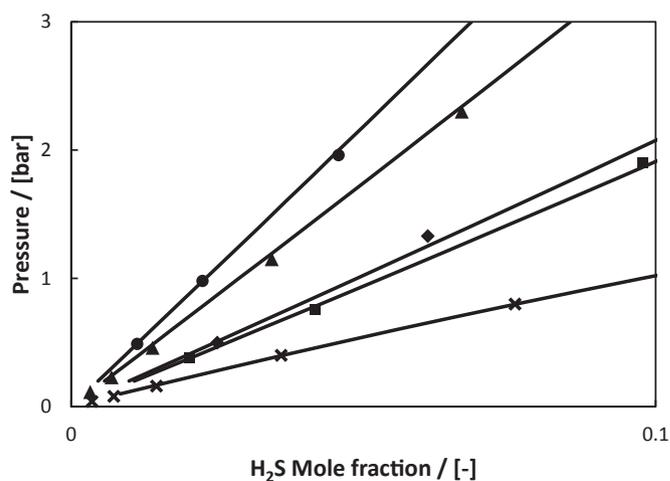


Fig. 2. Solubility of H₂S in PC (closed circles), NMP (closed triangles), Selexol (closed squares), Rectisol (crosses), and [bmim][Tf₂N] (closed diamonds) molecules at 333.15 K (except Rectisol at 248.15 K). The lines are fitted to the PR EOS. The fitted parameters are available in Table S15 of the Supplementary Content.

towards SO₂ than H₂S. Likewise, all solvents are more selective towards CS₂ and CH₃SH than COS. Therefore, COS and H₂S have the lowest solubility in all solvents. CS₂ is the highest soluble compound, followed by CH₃SH, and SO₂ in NMP, PC, Rectisol, and [bmim][Tf₂N]. This trend is reverse for Selexol (CS₂ < CH₃SH < SO₂). Little experimental data are available for these highly soluble compounds; thus, it is difficult to assess this trend quantitatively.

Typically the solubility of a gas in a solvent is evaluated in terms of Henry coefficients, specifically when the gas partial pressure is low:

$$H_{g,i} = \lim_{x_i \rightarrow 0} \frac{f_i}{x_i} \quad (1)$$

where f is the fugacity of the gas phase at a specific temperature, which is calculated from the PR EoS. We computed the Henry coefficients of all gases from the solubility data. In Table 1, the Henry

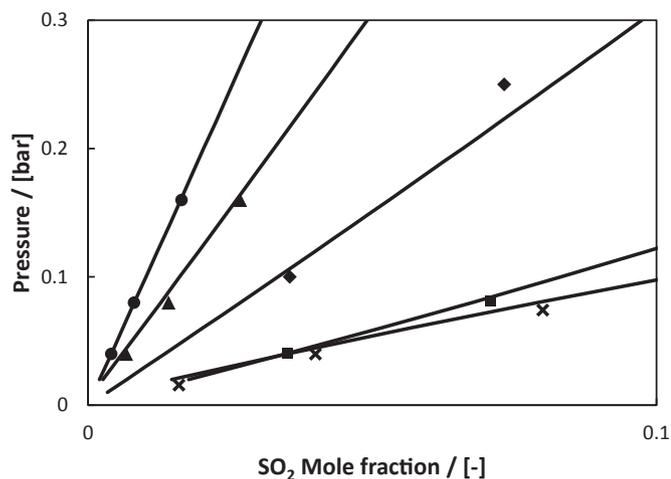


Fig. 3. Solubility of SO₂ in PC (closed circles), NMP (closed triangles), Selexol (closed squares), Rectisol (crosses), and [bmim][Tf₂N] (closed diamonds) molecules at 333.15 K (except Rectisol at 248.15 K). The lines are fitted to the PR EOS. The fitted parameters are available in Table S15 of the Supplementary Content.

Table 1

Henry coefficients (H_g /bar, Equation (1)) of the investigated solutes in PC, NMP, selexol, and the ionic liquid [bmim][Tf₂N] at 333.15 K and Rectisol at 248 K. The available experimental Henry coefficients are provided for comparison.

		PC	NMP	Selexol	Rectisol	[bmim][Tf ₂ N]
CS ₂	Sim.	2.3	1.6	3.2	0.42	1.2
	Exp.	–	–	–	–	–
CH ₃ SH	Sim.	3.5	1.9	2.4	0.51	2.4
	Exp.	–	–	–	–	–
SO ₂	Sim.	9.8	6.1	1.2	1.01	3.3
	Exp.	4.69 [47], 4.89 [48]	0.94 [48]	0.84 [49]	0.72 [50]	–
COS	Sim.	36.8	33.7	27.0	9.1	18.0
	Exp.	–	–	–	10.97 [5]	–
H ₂ S	Sim.	43.2	33.8	19.7	11.1	23.9
	Exp.	44.2 [47], 42.2 [51]	16.5 [52]	–	6.09 [5]	22.8 [53]
CO ₂	Sim.	156	135	68.6	42.9	62
	Exp.	154 [47], 142.6 [52]	115 [52]	65 [54]	43.0 [55], 40.8 [56]	64.2 [57], 56.0 [58]
CH ₄	Sim.	1500	1320	765	950	470
	Exp.	1340 [59], 1390 [60]	1100 [61]	394 [61]	840 [5], 990 [62]	522 [63]

coefficients of the solutes in the investigated solvents are presented. It is difficult to verify the calculated Henry coefficients of the highly soluble gases (e.g., CS₂ and CH₃SH) since no experimental data are available for these systems. From Table 1, it can be seen that there is a good agreement between most of the experimental data and the simulation results. Note that in our previous work, H₂S solubilities in [bmim][Tf₂N] were computed with a different force field. The new set of force field parameters and settings for H₂S, CO₂, and CH₄ provide more accurate results. For consistency reasons, we have repeated the solubility simulations of these solutes in [bmim][Tf₂N] including analytical tail corrections, which were excluded in our previous work [7]. For example, the experimental Henry coefficient of H₂S in the ionic liquid is 22.8 bar. The simulated Henry coefficients of H₂S in the previous work and the current study are 11.7 and 23.9, respectively [7]. This shows the superiority of the current force field of H₂S over the previous one. Nevertheless, the MC simulation data for SO₂ in NMP and PC show considerable deviation from the experimental data. A possible reason for this discrepancy is the assumption of rigid molecules for PC and NMP in the simulations. Only NMP and PC show large deviations between the simulated and experimental Henry coefficients (more than 500% and 100%, respectively) while this is not the case for the other solvent molecules. SO₂ has the largest van der Waals volume among the solutes followed by CS₂ and CH₃SH [45]. It

seems that the solubility of these large solutes in the rigid solvents is underpredicted since the internal degrees of freedom of the solvents, i.e., NMP and PC, are not taken into account. This is due to the ring in their structures which cannot be considered flexible in RASPA. Therefore, the solvent molecule cannot deform to provide further space for absorption of the large solutes. The other reason for this large discrepancy may be due to the used Lorentz-Berthelot mixing rules. The properties of pure components (the VLE of SO₂ and the densities of NMP and PC) are reproduced accurately with this set of force field parameters, as shown in Figures S12, S13, S21, and S22 of the Supplementary Content, but these mixing rules may not correctly predict the cross-interactions between SO₂ and the solvent molecules. Due to the lack of experimental data, it is not possible to validate this hypothesis for the other highly soluble gases (i.e., CS₂ and CH₃SH).

The Henry coefficient can be used to define the ideal selectivity:

$$S_{1,2}^{\text{ideal}} = \frac{H_{g,1}}{H_{g,2}} \quad (2)$$

The selectivity describes the performance of a solvent to sepa-

rate two fluids. In Table 2, the ideal selectivity of the sulfur compounds with respect to CO₂ as well as CO₂/CH₄ selectivities are provided. The partial pressures of the sulfur compounds, except H₂S, in natural gas or flue gas are relatively low. Therefore, ideal selectivities calculated from the ratio of Henry coefficients (Equation (2)) are expected to be close to the real selectivities. As mentioned in the introduction, NMP has the highest CO₂/H₂S selectivity, which is also predicted by the MC simulations. Rectisol is preferred when a high CO₂/H₂S selectivity is required. The high CH₄/CO₂ and CH₄/H₂S selectivities in Rectisol reduce the loss of valuable products. However, the disadvantage of this process is the

Table 2

The ideal selectivity (Equation (2)) of the acidic gases in the investigated solvents computed from MC simulations at a temperature of 333.15 K, except for Rectisol at 248.15 K.

Selectivity	PC	NMP	Selexol	Rectisol	IL [bmim][Tf ₂ N]
CH ₄ /CO ₂	9.6	9.8	11	22	7.6
CO ₂ /H ₂ S	3.6	4.0	3.5	3.9	2.6
CO ₂ /COS	4.2	4.0	2.5	4.5	3.4
CO ₂ /SO ₂	16	22	59	42	18
CO ₂ /CH ₃ SH	44	70	28	84	25
CO ₂ /CS ₂	71	85	21	103	52

low operating temperature and the required refrigeration. According to the MC simulations, Selexol and the ionic liquid [bmim][Tf₂N] have similar but lower selectivities for removing acidic gases. It should be pointed out that both solvents have a very low vapor pressure for a wide range of temperatures. Hence, the related processes do not need any solvent recovery. In addition, they can be used at high temperatures without significant degradation or solvent losses.

According to Tables 1 and 2, CO₂ has the lowest solubility (the largest Henry coefficient) among the acidic gases. The sulfur compounds can be categorized into two groups: “medium” and “highly” soluble gases. H₂S and COS belong to the former while SO₂, CS₂, and CH₃SH belong to the latter. This difference can be observed for H₂S and SO₂ in Figs. 2 and 3. Based on this classification, it is possible to propose guidelines for separating a hypothetical mixture containing all these sulfur compounds. Due to the high solubility of the second group, they can be separated in an initial stage of an acid gas removal process, which can be carried out at relatively high temperatures or low pressures. Either Selexol or the ionic liquid may be used if the operating temperature is high for their low vapor pressures. However, if the temperature is low, Rectisol provides the highest selectivity followed by NMP. The solubility of the other sulfur compounds and the valuable gases is very low for these operating conditions. If further removal is required, it can be achieved by using molecular sieves [46]. In the next stage, H₂S and COS can be removed. In contrast to the previous stage, high pressures and low temperatures are required. Depending on the application, both CO₂ and H₂S can be separated at the same time, so PC can be chosen in this case. Nonetheless, if two separate streams of H₂S and CO₂ are required, CO₂ should be removed from the gas in a third stage by using a highly selective solvent such as Rectisol or NMP. If deep CO₂ removal is required, a chemical solvent should be used to decrease the CO₂ concentration to ppm levels. Note that in the presence of COS and CS₂, it is better not to use MEA which irreversibly reacts with those solutes [1]. All acidic gases are removed by this stage and the remaining gas would mainly consist of valuable products like methane.

4. Conclusions

The acidic gases present in natural gas or post-combustion products can be detrimental to industrial apparatus and the environment. In the absence of experimental data, Monte Carlo simulations can be used to compute the solubility of corrosive and toxic compounds, which are difficult to measure experimentally. The solubilities of the acidic gases (H₂S, COS, CS₂, CH₃SH, SO₂, and CO₂) as well as CH₄ in four commercial solvents (PC, NMP, Selexol, and Rectisol) and an ionic liquid ([bmim][Tf₂N]) were calculated from MC simulations in the osmotic ensemble. The force field parameters of PC and COS were adjusted to reproduce the experimental density and VLE of the pure components, respectively. Good agreement between the available experimental data and the computed solubilities was observed. For all solvents, the solubility of the sulfur compounds is much higher than for the other compounds, i.e., methane and CO₂. In few cases, the MC simulations underpredict the solubility of highly soluble compounds, e.g., SO₂, which may be related to the use of rigid molecules for NMP and PC in the simulations or the inadequacy of the Lorentz-Berthelot mixing rules. A 2-stage (or 3-stage) process for removing the acidic gases is proposed based on the solubility of the solutes. SO₂, CS₂, or CH₃SH can be removed in the initial stage of the process due to the very high solubilities of these compounds in all solvents. This is followed by H₂S, COS, or CO₂ removal, which requires a higher pressure than the previous stage. If a separate stream of CO₂ is required, a third stage using NMP or Rectisol as physical solvents

can be added. Overall, the results show that in the absence of experimental data Monte Carlo simulations can be used to predict the solubility of toxic or corrosive compounds, which are relevant for the industry but difficult to measure experimentally.

Acknowledgments

This work was sponsored by NWO Exacte Wetenschappen (Physical Sciences) for the use of supercomputer facilities, with financial support from the Nederlandse Organisatie voor Wetenschappelijk Onderzoek (Netherlands Organisation for Scientific Research, NWO). TJHV acknowledges NWO-CW (Chemical Sciences) for a VICI grant. DD acknowledges NWO-CW (Chemical Sciences) for a VIDI grant.

Appendix A. Supplementary data

Supplementary data related to this article can be found at <http://dx.doi.org/10.1016/j.fluid.2016.11.015>.

References

- [1] A.L. Kohl, R. Nielsen, *Gas Purification*, fifth ed., Gulf Professional Publishing, Houston, 1997.
- [2] C. Branan, *Rules of Thumb for Chemical Engineers: a Manual of Quick, Accurate Solutions to Everyday Process Engineering Problems*, fourth ed., Gulf Professional Publishing, 2005.
- [3] J.A. Moulijn, M. Makkee, A.E. Van Diepen, *Chemical Process Technology*, second ed., John Wiley & Sons, Chichester, 2013.
- [4] R.N. Tennyson, R.P. Schaaf, Guidelines can help choose proper process for gas-treating plant, *Oil Gas J.* 75 (1977) 78.
- [5] B. Burr, L. Lyddon, A comparison of physical solvents for acid gas removal, in: *GPA Annu. Conv. Proc.*, vol. 1, Gas Processors Association (GPA), Grapevine, Texas, 2008, pp. 100–113.
- [6] M. Ramdin, T.W. de Loos, T.J.H. Vlucht, State-of-the-Art of CO₂ capture with ionic liquids, *Ind. Eng. Chem. Res.* 51 (24) (2012) 8149–8177.
- [7] M. Ramdin, S.P. Balaji, J.M. Vicent-Luna, J.J. Gutiérrez-Sevillano, S. Calero, T.W. de Loos, T.J.H. Vlucht, Solubility of the precombustion gases CO₂, CH₄, CO, H₂, N₂, and H₂S in the ionic liquid [bmim][Tf₂N] from Monte Carlo simulations, *J. Phys. Chem. C* 118 (41) (2014) 23599–23604.
- [8] M. Ramdin, T.J.H. Vlucht, T.W. de Loos, Solubility of CO₂ in the ionic liquids [TBMN][MeSO₄] and [TBMP][MeSO₄], *J. Chem. Eng. Data* 57 (8) (2012) 2275–2280.
- [9] M. Ramdin, T.Z. Olasagasti, T.J.H. Vlucht, T.W. de Loos, High pressure solubility of CO₂ in non-fluorinated phosphonium-based ionic liquids, *J. Supercrit. Fluids* 82 (2013) 41–49.
- [10] M. Ramdin, A. Amlianitis, T.W. de Loos, T.J.H. Vlucht, Solubility of CO₂/CH₄ gas mixtures in ionic liquids, *Fluid Phase Equilib.* 375 (2014) 134–142.
- [11] S. Bazhenov, M. Ramdin, A. Volkov, V. Volkov, T.J.H. Vlucht, T.W. de Loos, CO₂ solubility in biodegradable hydroxylammonium-based ionic liquids, *J. Chem. Eng. Data* 59 (3) (2014) 702–708.
- [12] Ramdin M., Chen Q., Balaji S.P., Vicent-Luna J.M., Torres-Knoop A., Dubbeldam D., Calero S., de Loos T.W., Vlucht T.J.H., Solubilities of CO₂, CH₄, C₂H₆, and SO₂ in ionic liquids and Selexol from Monte Carlo simulations, *J. Comput. Sci.*
- [13] M. Ramdin, S.P. Balaji, J.M. Vicent-Luna, A. Torres-Knoop, Q. Chen, D. Dubbeldam, S. Calero, T.W. de Loos, T.J.H. Vlucht, Computing bubble-points of CO₂/CH₄ gas mixtures in ionic liquids from Monte Carlo simulations, *Fluid Phase Equilib.* 4 (2015) 4–11.
- [14] D. Dubbeldam, A. Torres-Knoop, K.S. Walton, On the inner workings of Monte Carlo codes, *Mol. Simul.* 39 (14–15) (2013) 1253–1292.
- [15] D. Dubbeldam, S. Calero, D.E. Ellis, R.Q. Snurr, RASPA: molecular simulation software for adsorption and diffusion in flexible nanoporous materials, *Mol. Simul.* 42 (2) (2016) 81–101.
- [16] B.J. Banaszak, R. Faller, J.J. de Pablo, Simulation of the effects of chain architecture on the sorption of ethylene in polyethylene, *J. Chem. Phys.* 120 (23) (2004) 11304.
- [17] W. Shi, E.J. Maginn, Continuous fractional component Monte Carlo: an adaptive biasing method for open system atomistic simulations, *J. Chem. Theory Comput.* 3 (4) (2007) 1451–1463.
- [18] W. Shi, E.J. Maginn, Atomistic simulation of the absorption of carbon dioxide and water in the ionic liquid 1-n-hexyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide ([hmim][Tf₂N]), *J. Phys. Chem. B* 112 (7) (2008) 2045–2055.
- [19] W. Shi, E.J. Maginn, Molecular Simulation and Regular Solution Theory Modeling of Pure and Mixed Gas Absorption in the Ionic Liquid 1-n-hexyl-3-methylimidazolium bis(trifluoromethylsulfonyl)amide ([hmim][Tf₂N]), *J. Phys. Chem. B* 112 (51) (2008) 16710–16720.
- [20] X. Zhang, F. Huo, Z. Liu, W. Wang, W. Shi, E.J. Maginn, Absorption of CO₂ in the

- ionic liquid 1-n-hexyl-3-methylimidazolium tris(pentafluoroethyl)trifluorophosphate ([hmim][FEP]): a molecular view by computer simulations, *J. Phys. Chem. B* 113 (21) (2009) 7591–7598.
- [21] W. Shi, D.C. Sorescu, D.R. Luebke, M.J. Keller, S. Wickramanayake, Molecular simulations and experimental studies of solubility and diffusivity for pure and mixed gases of H₂, CO₂, and Ar absorbed in the ionic liquid 1-n-hexyl-3-methylimidazolium bis(trifluoromethylsulfonyl)amide ([hmim][Tf₂N]), *J. Phys. Chem. B* 114 (2010) 6531–6541.
- [22] S.P. Balaji, S. Gangarapu, M. Ramdin, A. Torres-Knoop, H. Zuilhof, E.L. Goetheer, D. Dubbeldam, T.J.H. Vlucht, Simulating the reactions of CO₂ in aqueous monoethanolamine solution by reaction ensemble Monte Carlo using the continuous fractional component method, *J. Chem. Theory Comput.* 11 (6) (2015) 2661–2669.
- [23] M. Ramdin, S.P. Balaji, A. Torres-Knoop, D. Dubbeldam, T.W. de Loos, T.J.H. Vlucht, Solubility of natural gas species in ionic liquids and commercial solvents: experiments and Monte Carlo simulations, *J. Chem. Eng. Data* 60 (10) (2015) 3039–3045.
- [24] A. Torres-Knoop, S.P. Balaji, T.J.H. Vlucht, D. Dubbeldam, A Comparison of advanced Monte Carlo methods for open systems: CFCMC vs CBMC, *J. Chem. Theory Comput.* 10 (3) (2014) 942–952.
- [25] A. Poursaidesfahani, A. Torres-Knoop, D. Dubbeldam, T.J.H. Vlucht, Direct free energy calculation in the continuous fractional component Gibbs ensemble, *J. Chem. Theory Comput.* 12 (4) (2016) 1481–1490.
- [26] D. Frenkel, B. Smit, *Understanding Molecular Simulation: from Algorithms to Applications*, second ed., Academic Press, London, 2002.
- [27] F. Wang, D.P. Landau, Efficient, multiple-range random walk algorithm to calculate the density of states, *Phys. Rev. Lett.* 86 (10) (2001) 2050–2053.
- [28] F. Wang, D.P. Landau, Determining the density of states for classical statistical models: a random walk algorithm to produce a flat histogram, *Phys. Rev. E* 64 (5) (2001) 056101.
- [29] N. Lubna, G. Kamath, J.J. Potoff, N. Rai, J.I. Siepmann, Transferable potentials for phase equilibria. 8. United-atom description for thiols, sulfides, disulfides, and thiophene, *J. Phys. Chem. B* 109 (50) (2005) 24100–24107.
- [30] J.J. Potoff, J.I. Siepmann, Vapor-liquid equilibria of mixtures containing alkanes, carbon dioxide, and nitrogen, *AIChE J.* 47 (7) (2001) 1676–1682.
- [31] H. Stassen, T. Dorfmueller, J. Samios, Molecular dynamics investigations of the electrostatic interactions in liquid carbonyl sulphide, *Mol. Phys.* 77 (2) (1992) 339–350.
- [32] A.A. Deakin, S.H. Walmsley, Potential energy functions and the carbonyl sulphide dimer, *J. Mol. Struct.* 247 (1991) 89–92.
- [33] M.S. Shah, M. Tsapatsis, J.I. Siepmann, Development of the transferable potentials for phase equilibria model for hydrogen sulfide, *J. Phys. Chem. B* 119 (23) (2015) 7041–7052.
- [34] M.H. Ketko, G. Kamath, J.J. Potoff, Development of an optimized intermolecular potential for sulfur Dioxide, *J. Phys. Chem. B* 115 (17) (2011) 4949–4954.
- [35] M.G. Martin, J.I. Siepmann, Transferable potentials for phase equilibria. 1. United-atom description of n-alkanes, *J. Phys. Chem. B* 102 (97) (1998) 2569–2577.
- [36] B. Chen, J.J. Potoff, J.I. Siepmann, Monte Carlo calculations for alcohols and their mixtures with alkanes. Transferable potentials for phase equilibria. 5. United-atom description of primary, secondary, and tertiary alcohols, *J. Phys. Chem. B* 105 (15) (2001) 3093–3104.
- [37] J.M. Stubbs, J.J. Potoff, J.I. Siepmann, Transferable potentials for phase equilibria. 6. United-atom description for ethers, glycols, ketones, and aldehydes, *J. Phys. Chem. B* 108 (45) (2004) 17596–17605.
- [38] L.B. Silva, L.C.G. Freitas, Structural and thermodynamic properties of liquid ethylene carbonate and propylene carbonate by Monte Carlo Simulations, *J. Mol. Struct. THEOCHEM* 806 (1–3) (2007) 23–34.
- [39] L. Gontrani, R. Caminiti, The structure of liquid N-methyl pyrrolidone probed by x-ray scattering and molecular simulations, *J. Chem. Phys.* 136(7).
- [40] H. Liu, E. Maginn, A molecular dynamics investigation of the structural and dynamic properties of the ionic liquid 1-n-butyl-3-methylimidazolium bis(trifluoromethanesulfonyl)imide, *J. Chem. Phys.* 135 (12) (2011) 124507.
- [41] M. Dinpajoo, P. Bai, D.A. Allan, J.I. Siepmann, Accurate and precise determination of critical properties from Gibbs ensemble Monte Carlo simulations, *J. Chem. Phys.* 143 (11) (2015) 114113.
- [42] A.Z. Panagiotopoulos, Direct determination of phase coexistence properties of fluids by Monte Carlo simulation in a new ensemble, *Mol. Phys.* 61 (4) (1987) 813–826.
- [43] A.Z. Panagiotopoulos, N. Quirke, M. Stapleton, D.J. Tildesley, Phase equilibria by simulation in the Gibbs ensemble, *Mol. Phys.* 63 (4) (1988) 527–545.
- [44] I.R. McDonald, NpT-ensemble Monte Carlo calculations for binary liquid mixtures, *Mol. Phys.* 23 (1) (1972) 41–58.
- [45] C.L. Yaws, *Thermophysical Properties of Chemicals and Hydrocarbons*, second ed., Gulf Publishing Company, Oxford, 2014.
- [46] G. Bloemendal, S. Kobussen, F. Scheel, *Capture and Convert - Handling Mercaptans in Hydrocarbon Streams*, 2008.
- [47] Y. Xu, R.P. Schutte, L.G. Hepler, Solubilities of carbon dioxide, hydrogen sulfide and sulfur dioxide in physical solvents, *Can. J. Chem. Eng.* 70 (3) (1992) 569–573.
- [48] K. Huang, S. Xia, X.-M. Zhang, Y.-L. Chen, Y.-T. Wu, X.-B. Hu, Comparative study of the solubilities of SO₂ in five low volatile organic solvents (sulfolane, ethylene glycol, propylene carbonate, N-methylimidazole, and N-methylpyrrolidone), *J. Chem. Eng. Data* 59 (4) (2014) 1202–1212.
- [49] K.A. Schmidt, A.E. Mather, Solubility of sulphur dioxide in mixed polyethylene glycol dimethyl ethers, *Can. J. Chem. Eng.* 79 (6) (2001) 946–960.
- [50] J. Tokunaga, Solubilities of sulfur dioxide in aqueous alcohol solutions, *J. Chem. Eng. Data* 19 (2) (1974) 162–165.
- [51] F.-Y. Jou, A.E. Mather, K.A.G. Schmidt, The solubility of hydrogen sulfide and carbon dioxide in propylene carbonate, *J. Chem. Eng. Data* 60 (12) (2015) 3738–3744.
- [52] O.R. Rivas, J.M. Prausnitz, Sweetening of sour natural gases by mixed-solvent absorption: solubilities of ethane, carbon dioxide, and hydrogen sulfide in mixtures of physical and chemical solvents, *AIChE J.* 25 (6) (1979) 975–984.
- [53] A.H. Jalili, M. Rahmati-Rostami, C. Ghotbi, M. Hosseini-Jenab, A.N. Ahmadi, Solubility of H₂S in ionic liquids [bmim][PF₆], [bmim][BF₄], and [bmim][Tf₂N], *J. Chem. Eng. Data* 54 (6) (2009) 1844–1849.
- [54] A. Henni, P. Tontiwachwuthikul, A. Chakma, Solubilities of carbon dioxide in polyethylene glycol ethers, *Can. J. Chem. Eng.* 83 (2) (2008) 358–361.
- [55] Y. Miyano, I. Fujihara, Henry's constants of carbon dioxide in methanol at 250–500 K, *Fluid Phase Equilib.* 221 (1–2) (2004) 57–62.
- [56] T. Chang, R.W. Rousseau, Solubilities of carbon dioxide in methanol and methanol-water at high pressures: experimental data and modeling, *Fluid Phase Equilib.* 23 (2–3) (1985) 243–258.
- [57] S. Raeissi, L.J. Florusse, C.J. Peters, Purification of flue gas by ionic liquids: carbon monoxide capture in [bmim][Tf₂N], *AIChE J.* 59 (10) (2013) 3886–3891.
- [58] J.L. Anthony, J.L. Anderson, E.J. Maginn, J.F. Brennecke, Anion effects on gas solubility in ionic liquids, *J. Phys. Chem. B* 109 (13) (2005) 6366–6374.
- [59] F.-Y. Jou, A.E. Mather, K.A.G. Schmidt, Solubility of methane in propylene carbonate, *J. Chem. Eng. Data* 60 (4) (2015) 1010–1013.
- [60] H. Renon, J.Y. Lenoir, P. Renault, Gas chromatographic determination of Henry's constants of 12 gases in 19 solvents, *J. Chem. Eng. Data* 16 (3) (1971) 340–342.
- [61] A. Henni, P. Tontiwachwuthikul, A. Chakma, Solubility study of methane and ethane in promising physical solvents for natural gas sweetening operations, *J. Chem. Eng. Data* 51 (1) (2006) 64–67.
- [62] M.H. Kapateh, A. Chapoy, R. Burgass, B. Tohidi, Experimental measurement and modeling of the solubility of methane in methanol and ethanol, *J. Chem. Eng. Data* 61 (1) (2016) 666–673.
- [63] S. Raeissi, C.J. Peters, High pressure phase behaviour of methane in 1-butyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide, *Fluid Phase Equilib.* 294 (12) (2010) 67–71.