



## UvA-DARE (Digital Academic Repository)

### UvA@Home 2017 Standard Platform Proposal

Gerbscheid, J.; Groot, T.; Visser, A.

**Publication date**

2016

**Document Version**

Final published version

[Link to publication](#)

**Citation for published version (APA):**

Gerbscheid, J., Groot, T., & Visser, A. (2016). *UvA@Home 2017 Standard Platform Proposal*. Intelligent Robotics Lab, University of Amsterdam.

<https://www.semanticscholar.org/paper/UvA-%40-Home-2017-Standard-Platform-Proposal-Gerbscheid-Groot/9c4562ef1733632cc9b9c69b21fbd6664d4d006b>

**General rights**

It is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), other than for strictly personal, individual use, unless the work is under an open content license (like Creative Commons).

**Disclaimer/Complaints regulations**

If you believe that digital publication of certain material infringes any of your rights or (privacy) interests, please let the Library know, stating your reasons. In case of a legitimate complaint, the Library will make the material inaccessible and/or remove it from the website. Please Ask the Library: <https://uba.uva.nl/en/contact>, or a letter to: Library of the University of Amsterdam, Secretariat, P.O. Box 19185, 1000 GD Amsterdam, The Netherlands. You will be contacted as soon as possible.

# UvA@Home 2017 Standard Platform Proposal

Jonathan Gerbscheid, Thomas Groot, and Arnoud Visser

University of Amsterdam  
Faculty of Science  
The Netherlands

<http://www.intelligentroboticslab.nl/>

**Abstract.** This proposal describes the approaches that will be taken by the UvA@Home team to compete in Standard Platform League with the Softbank Robotics Pepper. The research challenges concern person recognition, object recognition, object manipulation and navigation using the previous research and achievements of the UvA teams in the RoboCup.

## 1 Introduction

The UvA@Home team consists of two bachelor Artificial Intelligence students supported by a senior university staff member. The team was founded as a part of the Intelligent Robotics Lab at the beginning of the 2016-2017 academic year. The IRL acts as a governing body for all the University of Amsterdam's robotics teams, including the Dutch NAO Team and the UvA@Home team (both active in a RoboCup Standard Platform League). It encourages the sharing of experience between these teams to be successful in both leagues, which is possible because the Nao and the Pepper robot share the same NaoQi basis (although a slightly different version).

## 2 Background


The Universiteit van Amsterdam has a very long history in RoboCup [1]. The university has been active in the Soccer Simulation League [2], the MidSize League [3], the Rescue League [4], the 4-Legged League [5], the Rescue Simulation League [6] and the Standard Platform League [7]. The teams have won several prizes<sup>1</sup>, both in the competition as with the technical challenges.

The focus of the research of the university is on perception, world modeling and decision making. The @Home competition nicely fits in our research; the lack of a standard platform withheld us from entering the competition. Instead, we have initiated studies towards the simulation of the @Home competition [8, 9].

When qualified, the Intelligent Robotics Lab has the intention to buy a Pepper robot under the conditions of Softbank Robotics <sup>2</sup>, if the investment budget

<sup>1</sup> <http://www.robocup.nl/achievements.html>

<sup>2</sup> <http://www.robocupathome.org/athome-spl/pepper>

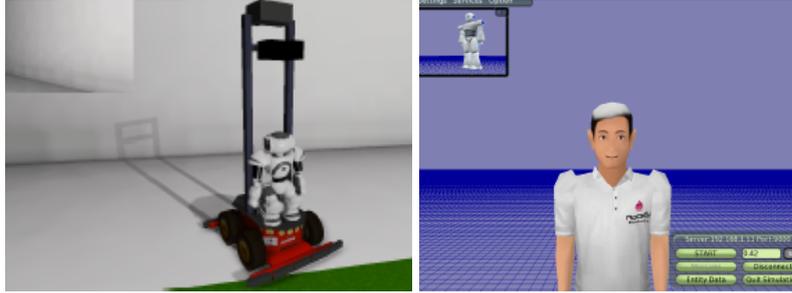

**Fig. 1.** An @Home robot in the UsarSim [10] and an @Home scenario in the SigVerse [11] simulation environment [8, 9].

of 2017 is approved. Otherwise, the university has good contact with two Dutch companies in the possession of a Pepper robot.

### 3 Person Recognition

Earlier work in the Dutch Nao Team [12] has focused on Nao recognition using the Viola-Jones Algorithm [13], an algorithm originally meant for facial recognition. It utilizes the cascading of weak classifiers technique to create a new algorithm with performance comparable to a strong classifier. While other algorithms may have a higher accuracy, the goal of the Viola-Jones Algorithm is to perform well on low CPU systems. The paper [12] applies this algorithm for Nao detection and runs on the 1.6 GHz Atom CPU of the Nao<sup>3</sup>. The approach is to extract Haar-like features from the upper and lower body to train weak classifiers using a dataset consisting of images taken of other Nao's during a RoboCup SPL match. The weak classifiers have a set of features of which the important ones are boosted according to the following equation.

$$w(x) = \begin{cases} 1 & \text{if } pf(x) < p\theta \\ 0 & \end{cases} \quad (1)$$

Where  $w(x)$  is the weak classifier,  $f(x)$  is the list of features for a sub-window  $x$  of the image,  $p$  is the parity which indicate the direction of the inequality sign and  $\theta$  indicates a threshold.

This approach performed best for the detection of limbs, especially those in the upper body and showed a lower recall but higher precision compared to the method implemented by another team in the SPL that used the same dataset [14]. Using the Pepper robot it will be possible to improve upon this


<sup>3</sup> [http://doc.aldebaran.com/2-1/family/robots/motherboard\\_robot.html#nao-v5-v4](http://doc.aldebaran.com/2-1/family/robots/motherboard_robot.html#nao-v5-v4)

algorithm utilizing the more powerful CPU <sup>4</sup> and apply it to a more complex dataset consisting of humans.

## 4 Object Recognition

Recognizing and localizing object is difficult to execute on robots who generally have low-end CPUs. Some of the previous approaches done by the Intelligent Robotics Lab and its members/collaborators include:

- The ROS object detector which relies on the OpenCV2 library used for the UvA@Home league [15].
- A series of color, contour, size and blob detection based approaches used for the Roasted Tomato Challenge [16].

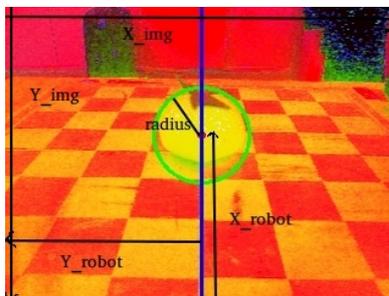

**Fig. 2.** Detecting of a tomato with a Nao robot using combined contour and color detection[16].

- A color invariant cognitive image pro-cessing module (CIP-module) based on the Recognition-By-Components (RBC) [17] used for ball and goal recognition in the Robocup SPL soccer competition.
- Optimizing the amount of perspectives that are required to correctly identify an object from the RoCKIn@Work competitions [18].
- In [19] categorization was accomplished by a Bag of Key-points approach, inspired by the method of Csurka et al. [20], to distinguish 10 different objects from the RoCKIn@Work competitions.
- In [21] categorization was accomplished using a decision tree approach based on shape and color, inspired by Alers et al. [22], to distinguish 10 different objects from the Ikea Duktig fruit and vegetable set.

The later two approaches make use of datasets recorded with an ASUS Xtion 3D sensor, which make their algorithms direct applicable to the Pepper robot.

<sup>4</sup> [http://doc.aldebaran.com/2-4/family/pepper\\_technical/motherboard\\_pep.html](http://doc.aldebaran.com/2-4/family/pepper_technical/motherboard_pep.html)

## 5 Object Manipulation

In most cases the goal of object recognition in the setting of the @Home league is the manipulation of said objects. Earlier work on the UvA@Work League [15] and the Roasted Tomato Challenge [16] have required the manipulation of objects. In both cases the MoveIt library [23] from the ROS framework was used. In this approach the MoveIt ROS Node receives a 3D world position from the object detection Node, the MoveIt Node contains a representation of the limbs and joints of the robot and uses those to solve the inverse kinematics. The joints are then moved to position the grabbing actuator to the object location.

[16] [24] [25] [23]

## 6 Localisation

The Pepper robot has an extensive set of sensors, but only the HR cameras provide long range measurements, which will mean that for localisation we have to rely on visual SLAM (or adjust our navigation strategy).

Although for long range measurements the baseline between the two HR cameras is too short, much can be learned from the motion of the robot. To verify the applicability of visual SLAM, tests with the available ros-packages<sup>5</sup> will be made.

## 7 Navigation

The Intelligent Robotics Lab has extensive experience with the application of laser-based simultaneous localisation and mapping algorithms for robots in a natural environment<sup>6</sup>, yet the point-clouds of the 6 laser scanners with their limited range of 5 meters will force us to fall back to the coastal navigation algorithms developed for the Minerva museum tour-guide robot [26].

## 8 Conclusions and future work

We are looking forward to explore the possibilities of the Softbank Robotics Pepper and the challenges imposed by the RoboCup@Home competition. A large benefit is that progress in this league is directly applicable to social relevant scenarios, something that can directly be communicated and disseminated to interested companies and the community.

<sup>5</sup> [http://wiki.ros.org/vslam\\_system/Tutorials/RunningVslamOnStereoData](http://wiki.ros.org/vslam_system/Tutorials/RunningVslamOnStereoData)

<sup>6</sup> the Care-O-Bot of the European ACCOMPANY project, the Giraff robot of the European TERESA project, the MBot robot of the European MOnarCH project

## Bibliography

- [1] Emiel Corten and Erik Rondema. Team description of the windmill wanderers. In *Proceedings on the second Robocup Workshop*, pages 347–352, July 1998.
- [2] Jelle R. Kok and Nikos Vlassis. Uva trilearn 2005 team description. In *Proceedings CD RoboCup 2005*, Osaka, Japan, July 2005.
- [3] Matthijs Spaan, Marco Wiering, Robert Bartelds, Raymond Donkervoort, Pieter Jonker, and Frans Groen. Clockwork orange: The dutch robosoccer team. In *RoboCup 2001: Robot Soccer World Cup V*, pages 627–630, Berlin, Heidelberg, 2002. Springer Berlin Heidelberg.
- [4] A. Visser and S. Oomes. Uva flying rescue 2003. Participant Information and Team Description - RoboCup Rescue Robot League, July 2003.
- [5] Arnoud Visser, Paul Van Rossum, Joost Westra, Jürgen Sturm, Dave Van Soest, and Mark De Greef. Dutch aibo team at robocup 2006. *Proceedings CD RoboCup*, June 2006.
- [6] Raymond Sheh, Sören Schwertfeger, and Arnoud Visser. 16 years of robocup rescue. *KI-Künstliche Intelligenz*, 30(3-4):267–277, 2016.
- [7] Jonathan Gerbscheid Thomas Groot Sebastien Negrijn Patrick de Kok Caitlin Lagrand, Michiel van der Meer. Dutch nao team - technical report. Technical report, Universiteit van Amsterdam, FNWI, 2016.
- [8] Sander van Noort and Arnoud Visser. *Extending Virtual Robots towards RoboCup Soccer Simulation and @Home*, pages 332–343. Springer Berlin Heidelberg, Berlin, Heidelberg, 2013.
- [9] Victor I.C. Hofstede. The importance and purpose of simulation in robotics. Bachelor thesis, Universiteit van Amsterdam, June 2015.
- [10] Stefano Carpin, Mike Lewis, Jijun Wang, Stephen Balakirsky, and Chris Scrapper. Usarsim: a robot simulator for research and education. In *Proceedings 2007 IEEE International Conference on Robotics and Automation*, pages 1400–1405. IEEE, 2007.
- [11] Tetsunari Inamura, Tomohiro Shibata, Hideaki Sena, Takashi Hashimoto, Nobuyuki Kawai, Takahiro Miyashita, Yoshiki Sakurai, Masahiro Shimizu, Mihoko Otake, Koh Hosoda, et al. Simulator platform that enables social interaction simulationsigverse: Sociointelligence simulator. In *System Integration (SII), 2010 IEEE/SICE International Symposium on*, pages 212–217. IEEE, 2010.
- [12] Duncan ten Velthuis. Nao detection with a cascade of boosted weak classifier based on aar-like features. Bachelor thesis, Universiteit van Amsterdam, 2014.
- [13] Paul Viola and Michael Jones. Rapid object detection using a boosted cascade of simple features. In *Computer Vision and Pattern Recognition, 2001. CVPR 2001. Proceedings of the 2001 IEEE Computer Society Conference on*, volume 1, pages I–511. IEEE, 2001.

- [14] Martin Engel. Anwendung von maschinellem lernen zur echtzeitfähigen und kalibrierungsfreien erkennung von humanoiden fußballrobotern. Bachelors thesis, HTWK Leipzig, 2012.
- [15] Valerie Scholten, Victor Milewski, Tessa Bouzidi, Celeste Kettler, and Arnoud Visser. Uva@ work, team description paper rockin camp 2015-peccioli, italy. *Team Description Paper, Intelligent Robotics Lab, Universiteit van Amsterdam, The Netherlands*, 2015.
- [16] Caitlin Lagrand, Michiel van der Meer, and Arnoud Visser. The roasted tomato challenge for a humanoid robot. In *Proceedings of the IEEE International Conference on Autonomous Robot Systems and Competitions (ICARSC)*, Bragana, Portugal, 2016.
- [17] Gabrielle E.H. Ras. Cognitive image processing for humanoid soccer in dynamic environments. Bachelor thesis, Universiteit Maastricht, 2014.
- [18] Sébastien Negrijn. Rockin@ work visual servoing - active vision using template matching on rgb-d sensor images. Bachelor thesis, Universiteit van Amsterdam, June 2015.
- [19] Areg Shahbazian. Taking up the rockin@work object recognition challenge with the bag of keypoints approach. Bachelor thesis, Universiteit van Amsterdam, June 2015.
- [20] Gabriella Csurka, Christopher Dance, Lixin Fan, Jutta Willamowski, and Cédric Bray. Visual categorization with bags of keypoints. In *Workshop on statistical learning in computer vision, ECCV*, volume 1, pages 1–2. Prague, 2004.
- [21] Robin Bakker. A comparison of decision trees for ingredient classification. Bachelor thesis, Universiteit van Amsterdam, June 2016.
- [22] Sjriek Alers, Daniel Claes, Joscha Fossel, Daniel Hennes, Karl Tuyls, and Gerhard Weiss. How to win robocup@ work? In *Robot Soccer World Cup*, pages 147–158. Springer, 2013.
- [23] Sachin Chitta, Ioan Sucan, and Steve Cousins. Ros topics. *IEEE robotics and automation magazine*, 2012.
- [24] Morgan Quigley, Ken Conley, Brian Gerkey, Josh Faust, Tully Foote, Jeremy Leibs, Rob Wheeler, and Andrew Y Ng. Ros: an open-source robot operating system. In *ICRA workshop on open source software*, volume 3, page 5. Kobe, Japan, 2009.
- [25] Gary Bradski et al. The opencv library. *Doctor Dobbs Journal*, 25(11):120–126, 2000.
- [26] Nicholas Roy, Wolfram Burgard, Dieter Fox, and Sebastian Thrun. Coastal navigation-mobile robot navigation with uncertainty in dynamic environments. In *Robotics and Automation, 1999. Proceedings. 1999 IEEE International Conference on*, volume 1, pages 35–40. IEEE, 1999.