



## UvA-DARE (Digital Academic Repository)

### UvA Rescue - Team Description Paper - Virtual Robot competition - Rescue Simulation League - Iran Open 2015, Tehran - Iran

Karaalioğlu, M.; Visser, A.

**Publication date**

2015

**Document Version**

Final published version

[Link to publication](#)

**Citation for published version (APA):**

Karaalioğlu, M., & Visser, A. (2015). *UvA Rescue - Team Description Paper - Virtual Robot competition - Rescue Simulation League - Iran Open 2015, Tehran - Iran*. Universiteit van Amsterdam.

**General rights**

It is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), other than for strictly personal, individual use, unless the work is under an open content license (like Creative Commons).

**Disclaimer/Complaints regulations**

If you believe that digital publication of certain material infringes any of your rights or (privacy) interests, please let the Library know, stating your reasons. In case of a legitimate complaint, the Library will make the material inaccessible and/or remove it from the website. Please Ask the Library: <https://uba.uva.nl/en/contact>, or a letter to: Library of the University of Amsterdam, Secretariat, P.O. Box 19185, 1000 GD Amsterdam, The Netherlands. You will be contacted as soon as possible.

# UvA Rescue Team Description Paper Virtual Robot competition Rescue Simulation League Iran Open 2015, Tehran - Iran

Mustafa Karaalioglu and Arnoud Visser

Universiteit van Amsterdam, Science Park 904, 1098 XH Amsterdam, NL  
<http://www.jointrescueforces.eu>

**Abstract.** This year the scan matching routines will be made fully 3 dimensional. A first attempt to incorporate the external library 3DTK to process the 3D point clouds was not successful, because the library did not contain online algorithms. Instead, this year the UvA rescue code will be extended from quadtrees towards octrees.

## Introduction

The RoboCup Rescue competitions provide benchmarks for evaluating robot platforms' usability in disaster mitigation. Research groups should demonstrate their ability to deploy a team of robots that explore a devastated area and locate victims. The Virtual Robots competition, part of the Rescue Simulation League [1], is a platform to experiment with multi-robot algorithms for robot systems with advanced sensory and mobility capabilities.

To be able to efficiently coordinate a team of robots in a disaster situation many state-of-the-art robotic techniques have to be integrated. Our approach is extensively described in previous Team Description Papers and aggregated in a Technical Report [2]. The later report gives an overview of the publications for the period 2008-2012. In addition, our team had several more recent publications [3–12]. In this paper we will concentrate on this year's innovations.

## 1 Team Members

USARCommander was originally developed by Bayu Slamet and all other contributions have been integrated into this framework. Many other team members have contributed to perception and control algorithms inside this framework.


The following contributions have been made and will be made this year:

**Mustafa Karaalioglu** : 3D scan matching  
**Arnoud Visser** : Planar 3D mapping

## 2 Planar 3D mapping

One of the main challenges faced in the competition (and for robots in general) concerns building a map of the environment as the robot explores it. The Amsterdam-Oxford team currently has software that enables a virtual robot to build a 2-dimensional map from sensor data. Although useful in a number of situations, this is potentially quite limiting in the real world, as search and rescue operations are unlikely to take place in perfectly flat environments. Therefore, the aim of this project is to extend the mapping capability to 3-dimensional space. This would give rescue workers a better idea of the layout of the environment, and would help to highlight features and hazards that would not be apparent in a 2D map.

In a previous attempt by Nelson [13] to build a 3-dimensional map inside USARSim, the classical ICP algorithm [14] was implemented efficiently with a *Kd-Tree*, an approach already advocated by Rusinkiewicz and Levoy [15]. For efficiency reasons, not the full 3D point-cloud was used by Nelson. Instead, only the edge-points of surfaces were used, which gave an efficiency improvement of a factor 100. The ICP algorithm tries to reduce the distance between the 3D-datapoints by finding the optimal translation and rotation vector, which implies a full 6D localization.

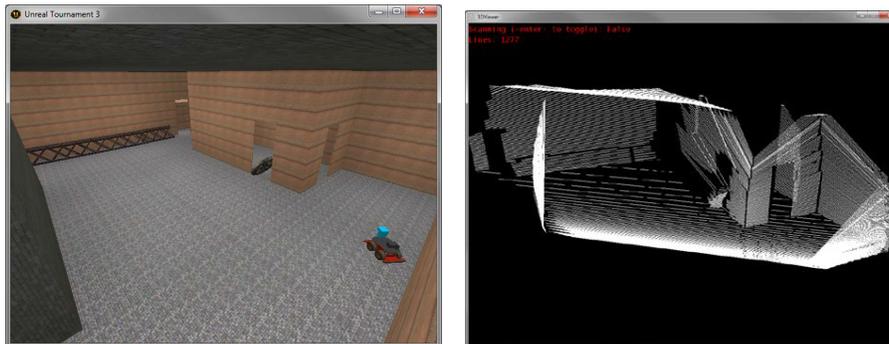


**Fig. 1.** Example of a 3D scan match inside USARSim. Courtesy Peter Nelson [13].

Yet, in the nomenclature of Borrmann *et al* [16] this is planar 3D mapping and not full 6D SLAM, because the 3D point-cloud consists of slices of a rotating 2D laser scanner. When acquiring this data while moving, the quality of the resulting map crucially depends on the pose estimate that is given by inertial sensors. In principle, the probabilistic methods from planar 2D mapping are extendable to full 3D mapping with 6D pose estimates. Yet, for 3D point-clouds it is essential to have a good strategy for reducing the computational costs of matching.

In the approach of Nelson [13], the 3D map is build based on *pairwise ICP*, which gives good results for local maps, but in the end registration errors sum

up. Borrmann *et al* [16] solve this by adding a loop-detector in the code, which indicates when a place is visited for a second time. At that moment a 6D graph optimization algorithm for global relaxation based on the method of Lu and Milios [17] is employed.

The benefit of using the 3D Toolkit is not only that it contains Lu and Milios' SLAM algorithm, but in addition that the whole implementation is highly efficient, for instance the data structure for the nodes is 8 times smaller than the data structure used in PCL [18].

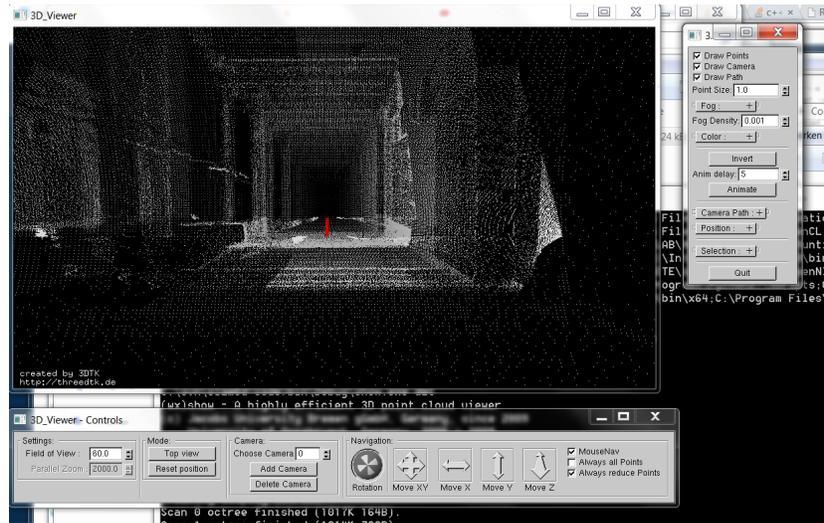

**Fig. 2.** Example of a 3D scan of a passage in Dagstuhl castle, recorded during the workshop 'Towards Affordance-Based Robot Control', 2006. Courtesy Andreas Nüchter [19].

Currently, an attempt is made to extend the implementation of the Weighted Scan Matcher based on quadtrees [20] to an implementation based on octrees using a similar data structure.

### 3 Optimizations

This year the robustness and responsiveness of our user interface has been greatly improved by a number of bug fixes in the code. During the competition at the Iran Open 2014 finally a memory leak was found which prevented us from scaling up the control of larger robot teams. After the Iran Open competition the responsiveness was improved by using event notifications instead of CPU-consuming event polling. In addition, the camera subview is now cut out of the Unreal Tournament window at the robot side (instead of the user interface side). This is both an improvement in realism (the robot camera does not have the whole Unreal Tournament overview) and in efficiency.

## 4 Conclusion

This paper summarizes the plans for improvement of the algorithms of the UvA Rescue team. In 2013 our team was active in the Darpa Robotics Challenge. Many developments inside our framework are not only valuable inside the Rescue Simulation League, but could also be valuable for the Soccer Simulation, the RoboCup@Home, RoboCup@Work [21] and the Standard Platform League [22]. For the Virtual Robot competition, developments towards full 3D mapping are important to bring the competition closer to field studies.

## References

1. Visser, A., Ito, N., Kleiner, A.: Robocup simulation innovation strategy paper. In: RoboCup Symposium Track on the Advancement of the RoboCup Leagues. (2014) submitted.
2. Visser, A.: UvA Rescue Technical Report: A description of the methods and algorithms implemented in the uva rescue code release. Technical Report IAS-UVA-12-02, Informatics Institute, University of Amsterdam, The Netherlands (2012)
3. Spirin, V., Cameron, S., de Hoog, J.: Time preference for information in multi-agent exploration with limited communication. In: 14th Towards Autonomous Robotics and Systems conference (TAROS 2013). (2013)
4. Akin, H.L., Ito, N., Jacoff, A., Kleiner, A., Pellenz, J., Visser, A.: Robocup rescue robot and simulation leagues. *AI Magazine* **34** (2013) 78–86
5. de Waard, M., Inja, M., Visser, A.: Analysis of flat terrain for the atlas robot. In: 3rd Joint Conference of AI Robotics and 5th RoboCup Iran Open International Symposium (RIOS). (2013) 1–6
6. Visser, A., de Hoog, J., Jimnez-Gonzalez, A., Ramiro Martinez de Dios, J.: Discussion of multi-robot exploration in communication-limited environments. In: Workshop "Towards Fully Decentralized Multi-Robot Systems: Hardware, Software and Integration" at the ICRA Conference. (2013)
7. van Noort, S., Visser, A.: Extending virtual robots towards robocup soccer simulation and @home. In Chen, X., Stone, P., Sucar, L., Zant, T., eds.: RoboCup 2012: Robot Soccer World Cup XVI. Volume 7500 of Lecture Notes in Computer Science. Springer Berlin Heidelberg (2013) 332–343
8. Amigoni, F., Visser, A., Tsushima, M.: Robocup 2012 rescue simulation league winners. In Chen, X., Stone, P., Sucar, L., Zant, T., eds.: RoboCup 2012: Robot Soccer World Cup XVI. Volume 7500 of Lecture Notes in Computer Science. Springer Berlin Heidelberg (2013) 20–35
9. Kootbally, Z., Balakirsky, S., Visser, A.: Enabling codesharing in rescue simulation with usarsim/ros. In Bethke, S., Veloso, M., Visser, A., Xiong, R., eds.: RoboCup 2013: Robot Soccer World Cup XVII. Volume 8371 of Springer's Lecture Notes on Artificial Intelligence. (2014) 593–600
10. Visser, A., Ito, N., Kleiner, A.: Robocup rescue simulation innovation strategy. (In: Proceedings of the 18th RoboCup Symposium)
11. Riaño Salamanca, I., Visser, A.: Final report 'establishing bonds for the advancement of the rescue league' (2014)
12. Traichioiu, M.: Hierarchical decision theoretic planning for robocup rescue agent simulation (2014)

13. Nelson, P.: 3d mapping for robotic search and rescue. 4th year project report, University of Oxford (2011)
14. Besl, P.J., McKay, N.D.: A method for registration of 3-D shapes. *IEEE Transactions on Pattern Analysis and Machine Intelligence* **14** (1992) 239–256
15. Rusinkiewicz, S., Levoy, M.: Efficient variants of the ICP algorithm. In: Third International Conference on 3D Digital Imaging and Modeling (3DIM). (2001) 145–153
16. Borrmann, D., Elseberg, J., Lingemann, K., Nchter, A., Hertzberg, J.: Globally consistent 3d mapping with scan matching. *Robotics and Autonomous Systems* **56** (2008) 130 – 142
17. Lu, F., Milios, E.: Globally Consistent Range Scan Alignment for Environment Mapping. *Autonomous Robots* **4** (1997) 333–349
18. Elseberg, J., Borrmann, D., Nüchter, A.: One billion points in the cloud - an octree for efficient processing of 3d laser scans. *ISPRS Journal of Photogrammetry & Remote Sensing (JPRS)*, Special issue on terrestrial 3D modelling **76** (2013) 76–88
19. Nüchter, A., Lingemann, K., Hertzberg, J., Surmann, H.: 6d slam3d mapping outdoor environments. *Journal of Field Robotics* **24** (2007) 699–722
20. Visser, A., Slamet, B.A., Pfingsthorn, M.: Robust weighted scan matching with quadtrees. In: Proc. of the 5th International Workshop on Synthetic Simulation and Robotics to Mitigate Earthquake Disaster (SRMED 2009). (2009)
21. Scholten, V., Milewski, V., Bouzidi, T., Kettler, C., Visser, A.: Uva@work - rockin camp 2015 - peccioli, italy. Team Description Paper, Intelligent Robotics Lab, Universiteit van Amsterdam, The Netherlands (2015)
22. de Kok, P., ten Velthuis, D., Backer, N., van Eck, J., Voorter, F., Visser, A., Thomas, J., Lopes, G.D., Ras, G., Roos, N.: Dutch nao team - team description for robocup 2014 - joo pessoa - brazil. University of Amsterdam, TU Delft & Maastricht University (2014)